



Power Take-Offs and Accessories for Truck Applications



***Your Resource for Hydraulic
Components and System Solutions***



An efficient solution for almost any truck



Parker has been a leading manufacturer and innovator in the field of mobile hydraulics for decades, with a long succession of class-leading products, backed up by equally impressive world-wide support. We know what you need, and we aim to provide the trucking industry with cost-efficient, durable solutions, engineered for a long, trouble-free service life.



To that effect, we now offer a wide range of engine and gear box mounted power take-offs, splitter boxes and tipper valves, custom designed to fit a large majority of the vehicles on the roads of Europe. In this catalogue you will find a selection, but there are many other versions available. All units are also available for prop shaft drive.





Also, whenever a new truck engine or gearbox is launched by a major manufacturer, you can rest assured that our engineers very soon will have a thoroughly tested, well-engineered custom power take-off available.

All models provide simple installation, reliable operation and low life cycle cost, and you will have no trouble finding a ratio or output capacity to suit your application. Together with a complete array of hydraulic pumps, hoses, fittings and connectors and auxiliary equipment, all your auxiliary power equipment system components are available from Parker.



Note: You need to know your gearbox ratio to calculate the actual resulting ratio between pump and engine rpm. Ratios listed in this catalogue are internal PTO ratios, unless otherwise noted.

-  = Rear mount
-  = Side mount

CONTENTS	PAGE
Gearbox and engine mounted Power Take-Offs/adapters	3
Tractor Power Take-Offs	13
Prop shaft adapters	13
Splitter boxes	14
Tipping valves	14
Compressors	15



PTO for Eaton Twin Splitter

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.02
Pump rotation	L
Part number	0013121903



PTO for Eaton 4106/5206

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.32
Pump rotation	R
Part number	0050123503



PTO for Eaton 4106/5206

Power, kW (1000 r/min)	27
Max continuous output torque, Nm	250
Internal Ratio	1:1:70
Pump rotation	R
Part number	00501210103



PTO for Eaton 6109/8309

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.35
Pump rotation	R
Part number	0013126503



PTO for Eaton 6109/8309, Heavy Duty

Power, kW (1000 r/min)	39
Max continuous output torque, Nm	350
Internal Ratio	1:1.30
Pump rotation	R
Part number	0013129503

PTO for Eaton 6109/8309



Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.32
Pump rotation	R
Part number	00501210903



PTO for Iveco 5S-200



Power, kW (1000 r/min)	13
Max continuous output torque, Nm	120
Internal Ratio	1:1.72
Pump rotation	L
Part number	0050066903

Requires pneumatic compressor, part no. 908099(12V)/909499(24V), see p. 15



PTO for Iveco 2845.6, 2855.6



Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.35
Pump rotation	R
Part number	0013062203



PTO for Iveco 2845.6, 2855.6



Power, kW (1000 r/min)	37
Max continuous output torque, Nm	350
Internal Ratio	1:1.56
Pump rotation	L
Part number	0013061503



PTO for Iveco 2865.6



Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.35
Pump rotation	R
Part number	0013062303





PTO for Iveco 2865.6

Power, kW (1000 r/min)	37
Max continuous output torque, Nm	350
Internal Ratio	1:1.77
Pump rotation	L
Part number	0013062003



PTO for Iveco 2895.9

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.35
Pump rotation	R
Part number	0013064503



PTO for Iveco 2895.9 Heavy Duty

Power, kW (1000 r/min)	39
Max continuous output torque, Nm	350
Internal Ratio	1:1.30
Pump rotation	R
Part number	0013065903



PTO for Iveco 28026

Power, kW (1000 r/min)	16
Max continuous output torque, Nm	140
Overall Ratio	1:1.18
Pump rotation	R
Part number	0050067003

Requires pneumatic compressor, part no. 908099(12V)/909499(24V), see p. 15



PTO for Iveco 2838.5

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Overall Ratio	1:0.85
Pump rotation	L
Part number	0013065103

PTO for Isuzu MZZ6F



Power, kW (1000 r/min)	21
Max continuous output torque, Nm	200
Internal Ratio	1:0.94
Pump rotation	L
Part number	0050195003

Requires pneumatic compressor, part no. 908099(12V)/909499(24V), see p. 15



Engine adapter for MAN

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Overall Ratio	1:1.35
Pump rotation	R
Part number	0050081703



PTO for Mercedes G28, G32



Power, kW (1000 r/min)	16
Max continuous output torque, Nm	150
Internal Ratio	1:1
Pump rotation	R
Part number	0013075303



PTO for Mercedes G60, G85



Power, kW (1000 r/min)	27
Max continuous output torque, Nm	250
Internal Ratio	1:1.70
Pump rotation	R
Part number	00500711603



PTO for Mercedes G100



Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.32
Pump rotation	R
Part number	0013078203





PTO for Mercedes G100

Power, kW (1000 r/min)	27
Max continuous output torque, Nm	250
Internal Ratio	1:1.70
Pump rotation	R
Part number	00500711203



PTO for Mercedes G131.9

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.32
Pump rotation	R
Part number	00500716203



PTO for Mercedes G210/240/260

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.32
Pump rotation	R
Part number	00500713303



PTO for Mercedes G210/240/260

Power, kW (1000 r/min)	27
Max continuous output torque, Nm	250
Internal Ratio	1:1.70
Pump rotation	R
Part number	00500713503



Engine adapter for Mercedes V8

Power, kW (1000 r/min)	43
Max continuous output torque, Nm	390
Overall Ratio	1:1.07
Pump rotation	R
Part number	0050700704

Engine adapter for Mercedes V12


Power, kW (1000 r/min)	52
Max continuous output torque, Nm	500
Overall Ratio	1:1.26
Pump rotation	R
Part number	0013706404



PTO for Mitsubishi M035 S5

Power, kW (1000 r/min)	16
Max continuous output torque, Nm	150
Internal Ratio	1:0.51
Pump rotation	R
Part number	0050174703

Requires pneumatic compressor, part no. 908099(12V)/909499(24V), see p. 15



Double PTO for Scania GRS 900

Power, kW (1000 r/min)	Upper 42/Lower 37
Max cont. output torque, Nm	Upper 400/Lower 350
Internal Ratio	Upper H 1:1.45, L 1:1.20 Lower H 1:1.79, L 1:1.48
Pump rotation	L
Part number	0013092853



PTO for Scania GR 801 Heavy Duty

Power, kW (1000 r/min)	43
Max continuous output torque, Nm	400
Internal Ratio	1:1.24
Pump rotation	L
Part number	3797774



PTO for Scania GR 900 Heavy Duty

Power, kW (1000 r/min)	43
Max continuous output torque, Nm	400
Internal Ratio	1:1
Pump rotation	L
Part number	3796477





PTO for Scania GRS 900 Heavy Duty



Power, kW (1000 r/min)	43
Max continuous output torque, Nm	400
Internal Ratio	1:1.19
Pump rotation	L
Part number	3795636

Engine adapter for Scania ED 90



Max continuous output torque, Nm	360
Overall Ratio	1:0.975
Pump rotation	R
Part number	3791729

Engine adapter for Scania ED 120



Max continuous output torque, Nm	600
Overall Ratio	1:1.19
Pump rotation	R
Part number	3783080

Engine adapter for Scania ED 160



Max continuous output torque, Nm	600
Overall Ratio	1:1.19
Pump rotation	L
Part number	3782001

PTO adapter for Unimog



Max continuous output torque, Nm	400
Overall Ratio	1:1/1:1.36
Pump rotation	R/L
Part number	3705750

Double PTO for Volvo R 1000 Series



Power, kW (1000 r/min)	Rear 43, front 32
Max cont. output torque, Nm	Rear 400, front 300
Internal Ratio	1:1.76
Pump rotation	Rear L, front R
Part number	0050115053

Other versions available on request – please contact us.



PTO for Volvo R 1000 Series, forward facing



Power, kW (1000 r/min)	43
Max continuous output torque, Nm	400
Internal Ratio	1:1.76
Pump rotation	R
Part number	0050114903

Other versions available on request – please contact us.



PTO for Volvo R 1000 Series



Power, kW (1000 r/min)	47
Max continuous output torque, Nm	440
Internal Ratio	1:1
Pump rotation	L
Part number	3794646



PTO for Volvo R 1000 Series



Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.32
Pump rotation	R
Part number	0050113503



PTO for Volvo R 1000 Series



Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.59
Pump rotation	R
Part number	3792887





PTO for Volvo R 1000 Series

Power, kW (1000 r/min)	43
Max continuous output torque, Nm	400
Internal Ratio	1:1.62
Pump rotation	R
Part number	0013111703



PTO for ZF S5-42 (4.65)

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.67
Pump rotation	L
Part number	0013109203



PTO for ZF S5/42 (5.72)

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.20
Pump rotation	L
Part number, left side mount (shown)	0013106503
Part number, right side mount	0013003326



PTO for ZF S6 300

Power, kW (1000 r/min)	19
Max continuous output torque, Nm	180
Internal Ratio	1:1.76
Pump rotation	L
Part number	00501015503



PTO for ZF S6-36, 6S 850 Heavy Duty

Power, kW (1000 r/min)	39
Max continuous output torque, Nm	350
Internal Ratio	1:1.30
Pump rotation	R
Part number	00501016103

PTO for ZF S6-36, 6S 850

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.32
Pump rotation	R
Part number	0050109903



PTO for ZF S6-36, 6S 850

Power, kW (1000 r/min)	27
Max continuous output torque, Nm	250
Internal Ratio	1:1.70
Pump rotation	R
Part number	00501016403



PTO for ZF S5-90, S6-90

Power, kW (1000 r/min)	63
Max continuous output torque, Nm	600
Internal Ratio	1:1
Pump rotation	L
Part number	3705909



PTO for ZF S5-90, S6-90 Heavy Duty

Power, kW (1000 r/min)	39
Max continuous output torque, Nm	350
Internal Ratio	1:1.30
Pump rotation	R
Part number	00501015803



PTO for ZF S5-90, S6-90

Power, kW (1000 r/min)	32
Max continuous output torque, Nm	300
Internal Ratio	1:1.32
Pump rotation	R
Part number	00501010003





PTO for ZF S5-90, S6-90

Power, kW (1000 r/min)	27
Max continuous output torque, Nm	250
Internal Ratio	1:1.70
Pump rotation	R
Part number	00501016503



Trac-Power PTO

Power, kW (1000 r/min)	82
Max continuous output torque, Nm	800
Internal Ratio	1:2.50
Pump rotation	L
Part number	0013606699

Other versions available on request – please contact us.



Spacer adapter 85 mm

Max continuous output, kW	See PTO
Max continuous output torque, Nm	See PTO
Part number	0050703104



Spacer adapter 125 mm

Max continuous output, kW	See PTO
Max continuous output torque, Nm	See PTO
Part number	0050703304

Splitter Box SB 118

Max. continuous output, kW	80
Max. continuous input torque, Nm	700
Max. peak input torque, Nm	1000
Ratio	1:1.18
Pump rotation	L/R
Part number	3794981



Splitter Box SB 154

Max. continuous output, kW	80
Max. continuous input torque, Nm	700
Max. peak input torque, Nm	1000
Ratio	1:1.54
Pump rotation	L/R
Part number	3705100



Splitter Box SB 154 Disengageable

Max. continuous output, kW	80
Max. continuous input torque, Nm	700
Max. peak input torque, Nm	1000
Ratio	1: 1.54
Pump rotation	L/R
Part number	00506010599



Tipping Valve BZDP 070

Flow, l/min	70
Max. pressure, bar	350
Thread	3/4" BSP
Part number	00509027290



Tipping Valve BZDP 120



Flow, l/min	120
Max. pressure, bar	400
Thread	3/4" BSP
Part number	00509024390

Tipping Valve BZDP 180-1P



Flow, l/min.	180
Max. pressure, bar	400
Thread	1" BSP
Part number	00509028990

12/24 V Compressor



Max. pressure	8 bar
0–6 bar at V = 1 litre	40 sec
Temperature range	-30/+80 °C
Part number, 24 V	0050908099
Part number, 12 V	0050909499

Parker – Providing the Industry with Complete System Solutions



Parker's System Development Process

The System Development Process is a joint effort between Parker and the customer, designed to maximize the results of a systems evolution. It begins with communications and scope planning. The next step is baseline testing and benchmarking, to establish goals and objectives. The rationalization process calls upon brainstorming the technical strategy. The optimization process quantifies the customer's desired gains and allows for refinement. Validation is completed before production release.

Dedication to Mobile Hydraulics

The Mobile Systems Division of Parker is dedicated to the development of mobile hydraulic systems and solutions. Located in Borås, MSD was designed to provide a centralized location for engineering, product development, systems testing and complete

customer training and technical support. Parker's multi-bay facilities provide opportunities to evaluate, redesign and refit any piece of mobile equipment with the latest hydraulics technology. Shop and field-testing are also part of our capabilities.

The Scope of Parker

Parker Hannifin is a leading global motion-control company, dedicated to delivering **Premier Customer Service**. Parker is the only manufacturer to offer its customers a choice of hydraulic, pneumatic and electro-mechanical motion-control solutions. Our company has the largest distribution network in its field, with over 8,300 distributors serving approximately 400,000 customers world-wide, providing the

most complete product offering in the Refuse Industry today.

All from One Supplier


The Parker range of products and system solutions is constantly expanding and evolving, reaching ever higher levels of performance, functionality, reliability and durability. We are always striving to develop the real life performance of our components even further, to meet and exceed future demands, always backing them up with extensive training and field technical support around the clock, world-wide. This is just one of many ways in which we show our commitment to a truly Premier Customer Service, and this is why Parker is the only supplier you need when it comes to motion-control technology for the refuse industry.

We're Where You Are... Worldwide!

To order products, CDs or additional information:

In the USA, call 1-800-CPARKER
E-mail: c-parker@parker.com
www.parker.com/hydraulics

In Europe, call 00800-27 27 53 74
E-mail: eurohyd@parker.com
www.parker.com/eurohyd

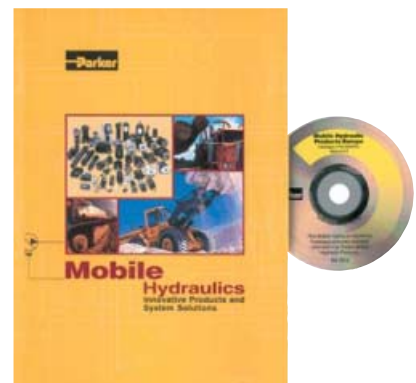

Parker Hannifin
Hydraulics Group (Europe)
Parker House, 55 Maylands Ave.
Hemel Hempstead, Herts, HP2 4SJ
Tel.: +44 1442 458 000
Fax: +44 1442 458 200
www.parker.com/eu

HY17-8260/UK
1M 08/04 NRS
© 2004
Parker Hannifin Corporation
All rights reserved. Subject to change without notice.