

# Blowgun Kits

**Ready for use**, **simple** and **ergonomic**, the Parker Legris blowgun kit remains an essential item of equipment for any blowing or spraying operation in the industrial environment.

## Product Advantages

### Ready for Use

- Kit contents:
- one blowgun
  - a 4 metre recoil tube
  - one R1/4 threaded fitting, external diameter 8 mm
- Easy to install and comfortable to use  
 Wide range of models and nozzles for optimum flow  
 Lower or upper connection  
 Labelling and colours can be customised  
 Packaging designed to facilitate self-service sales

### Safety & Performance

- Safe operation with the Safety or OSHA models  
 Durable, shock-resistant materials  
 100% leak and flow-tested in production  
 Date coding to guarantee quality and traceability  
 Minimum pressure drop  
 Optimisation of your energy consumption with the Energy-Saving model



Manufacturing Workshops

- Cleaning
- Blowing
- Mixing
- Ejection
- Cooling
- Packaging

Applications

## Technical Characteristics

<b>Compatible Fluids</b>	Compressed air Other fluids: contact us
<b>Working Pressure</b>	0 to 10 bar
<b>Working Temperature</b>	Air: -15°C to +50°C Dry air: -20°C to +80°C
<b>Tubes</b>	Recoil tubing

### Regulations

#### Compliance for all blowguns:

- DI: 97/23/EC (PED)  
 DI: 2002/95/EC (RoHS), 2011/65/EC  
 DI: 1907/2006 (REACH)


#### Protection of design

All designs and models of Parker Legris blowguns have been registered with the following numbers: 13224 / 13225 / 13226.

#### Compliance for specific blowguns:

- DI: 1910.242 (b) [OSHA]  
 The static pressure must be less than 30 psi in case the nozzle becomes blocked.  
 DI: 1910.95 (b) [OSHA]  
 The noise level must be less than 90 dBA over 8 hours' exposure.  
 DI: 2003/10/EC  
 Regulation relating to exposure to noise, particularly with regard to risks to hearing. The noise level must be less than 87 dBA.

### Component Materials

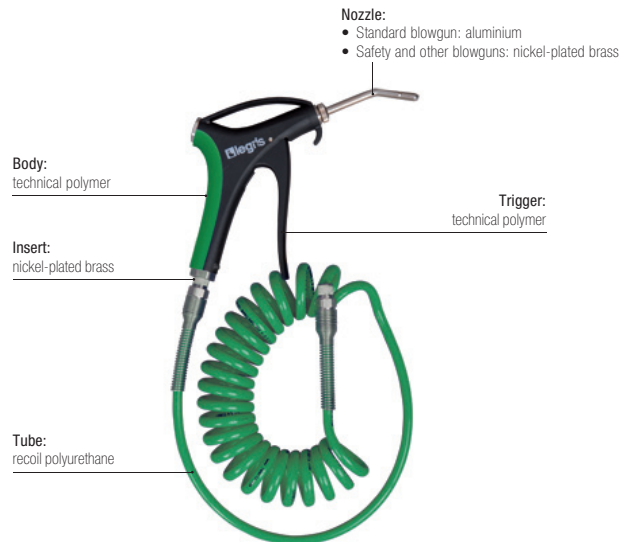

### Silicone-free




## Customisation on request

- Marking
- Kit contents adaptable to your applications
- Additional functions
- Colour






# Blowgun Kits


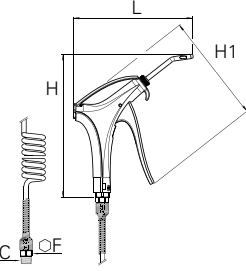

## 0631..09 Blowgun Kit, Lower Connection, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, treated aluminium, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 09</b></p>	16	192.5	139.5	152	0.441
<p>Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0659 00 13).</p>							




## 0631..01 Safety Blowgun Kit, Lower Connection, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 01</b></p>	16	198.5	148.5	154	0.575
<p>Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0654 00 13).</p>							

## 0631..23 Energy Saving Blowgun Kit with Angled Nozzle, Male BSPT Thread


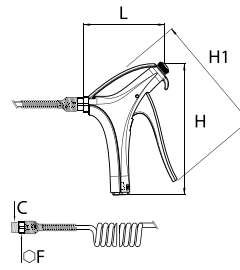

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 23</b></p>	16	195	148.5	154	0.456
<p>Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0653 66 13). External diameter of tube 6 mm</p>							

## 0631..03 Blowgun Kit, Lower Connection with Standard Nozzle, Male BSPT Thread


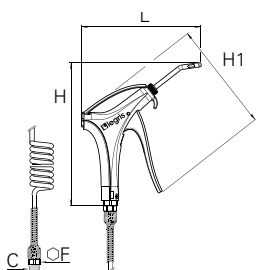

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 03</b></p>	16	165	148.5	99	0.528
<p>Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0651 66 13).</p>							

# Blowgun Kits


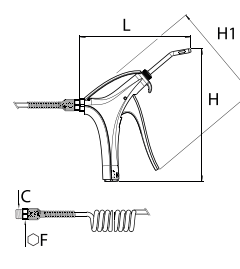

## 0631..02 Blowgun Kit, Upper Connection with Standard Nozzle, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 02</b></p>	16	163	148.5	101	0.524
<p>Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0658 66 13).</p>							




## 0631..05 Blowgun Kit Lower Connection with Short Angled Nozzle, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 05</b></p>	16	195,5	148,5	163	0,536
<p>Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0656 66 13).</p>							

## 0631..04 Blowgun Kit, Lower Connection with Short Angled Nozzle, Male BSPT Thread


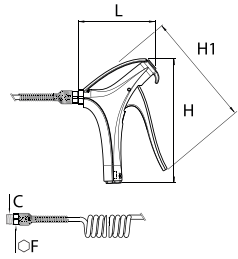

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 04</b></p>	16	195	148.5	163.5	0.617
<p>Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0657 66 13).</p>							

## 0631..07 Blowgun Kit, Lower Connection with Interchangeable Nozzle, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 07</b></p>	16	163	148.5	91	0.617
<p>Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0656 66 13). Delivered without nozzle.</p>							




# Blowgun Kits

## 0631..06 Blowgun Kit, Upper Connection with Interchangeable Nozzle, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 06</b></p>	16	161.5	148.5	93	0.501

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0655 66 13).  
Delivered without nozzle.

## 0631..08 Energy Saving Blowgun Kit, Lower Connection, Interchangeable Nozzle, Male BSPT Thread

	<p>Technical polymer, nickel-plated brass, NBR, polyurethane tubing</p> 	<p><b>C</b> </p>	<b>F</b>	<b>H</b>	<b>H1</b>	<b>L</b>	<b>kg</b>
		<p>R1/4 <b>0631 00 08</b></p>	16	163	148.5	91	0.496

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0653 66 13).  
Delivered without nozzle.