




45° Swept Female ORFS Swivel

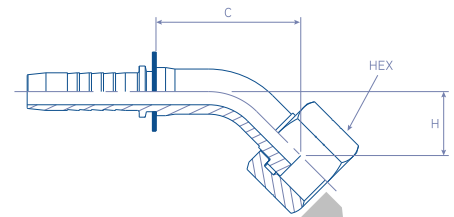

23.4444.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

REFERENCE	hose dash	hose Ø inch	thread inch	C cut off mm	H mm	HEX mm
23.4444.0404	-4	1/4"	9/16" - 18	32.5	11.0	17
23.4444.0406	-4	1/4"	11/16" - 16	36.0	13.0	22
23.4444.0506	-5	5/16"	11/16" - 16	39.0	13.0	22
23.4444.0606	-6	3/8"	11/16" - 16	36.0	13.4	22
23.4444.0608	-6	3/8"	13/16" - 16	39.0	15.0	24
23.4444.0808	-8	1/2"	13/16" - 16	43.0	15.0	24
23.4444.0810	-8	1/2"	1" - 14	45.0	17.0	30
23.4444.0812	-8	1/2"	1.3/16" - 14	54.0	21.0	36
23.4444.1008	-10	5/8"	13/16" - 16	54.0	22.0	24
23.4444.1010	-10	5/8"	1" - 14	55.0	21.0	30
23.4444.1012	-10	5/8"	1.3/16" - 14	57.0	23.0	36
23.4444.1210	-12	3/4"	1" - 14	60.0	23.0	30
23.4444.1212	-12	3/4"	1.3/16" - 14	62.0	22.0	36
23.4444.1216	-12	3/4"	1.7/16" - 12	66.0	24.0	41
23.4444.1616	-16	1"	1.7/16" - 12	76.0	27.0	41
23.4444.1620	-16	1"	1.11/16" - 12	76.0	27.0	50
23.4444.2020	-20	1.1/4"	1.11/16" - 12	95.0	34.0	50
23.4444.2424	-24	1.1/2"	2" - 12	120.0	45.0	60

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating /
ROHS compliant

VERSIONS: Stainless Steel (add an 'S'
at the end of the REFERENCE)