

# FLEXACONN PU/ECO




## APPLICATION - ANWENDUNG - USO - APPLICATION

[EN] for suction of air and dusts in the pharmaceutical wood and industry, agriculture and ceramics.

[DE] zum absaugen von luft und rauch besonders für die landwirtschaft, karosseriewerkstätten und die keramik-, holz- und pharmaindustrie geeignet.

[ES] para aspiracion de aire y polvos en la industria farmacéutica, carrocerías, agricultura, cerámica, carpintería

[FR] pour l'aspiration d'air et poussières dans l'industrie pharmaceutique, carrosseries, agriculture, ceramique, menuiserie.

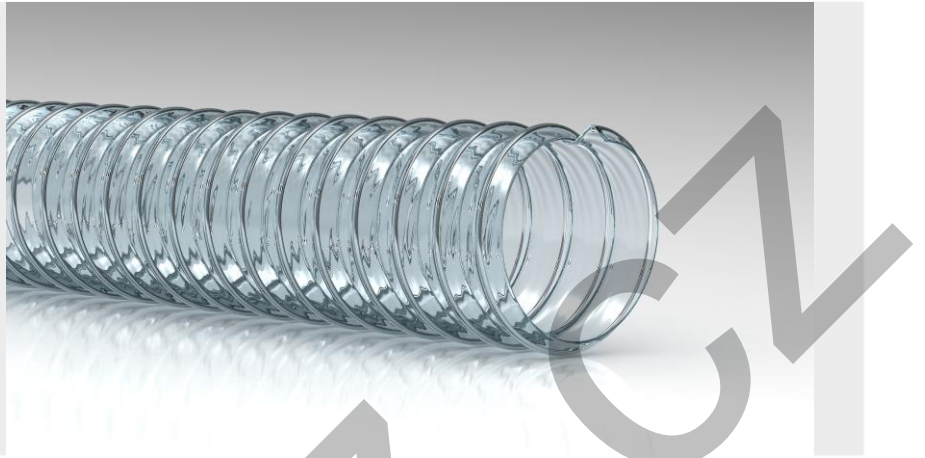

## STRUCTURE - AUFBAU - ESTRUCTURA - STRUCTURE

[EN] **Construction:** flexible polyurethane hose with built- steel spiral

**Cover:** in polyurethane, excellent resistance to abrasion.

[DE] **Konstruktion:** flexible polyurethanschlauch mit verzinkter spirale aus saitenstahl. **Decke:** aus polyurethane, gute reibbeständigkeit

[ES] **Construcción:** manguera en poliuretano flexible con espiral de acero cincado **Cobertura:** en poliuretano muy resistente a la abrasion

[FR] **Construction:** tuyau flexible en polyuréthane avec spirale en acier harmonique galvanise

**Revetement:** en polyurethane, extremement resistant a l'abrasion

mm	bar	bar	gr/mt	mm	mt
50		0,2	285	35	20
60		0,15	255	42	20
70		0,13	300	55	20
80		0,1	340	60	20
90		0,09	380	67	20
100		0,09	410	75	20
120		0,07	550	90	20
125		0,06	565	92	20
130		0,06	580	95	20
140		0,05	680	100	20
150		0,05	765	110	20
160		0,05	815	120	20
180		0,04	860	130	20
200		0,04	955	150	20
250		0,03	1150	180	20
300		0,02	1385	220	20
350		0,02	2030	250	20



## RECOMMENDED CLAMP/COLLAR - EMPFOHLENE KLAMMER/KRAGEN - ABRAZADERA/COLLAR RECOMENDADO - COLLIER/COLLIER RECOMMANDÉ

STF - Hose clamps with screw  
STC - Hose clamps with bolt  
SBV - Double wire screw



-40°C / +90°C  
-40°F / +194°F



NORM.: ISO 1307