

AQUACONN POMPE 20



APPLICATION - ANWENDUNG - USO - APPLICATION

[EN] for discharge of water in agricultural and industrial applications..

[DE] zur verwendung in industrie und landwirtschaft.

[ES] para el suministro de agua en agricultura e industria

[FR] refoulement d'eau dans l'industrie et l'agriculture



STRUCTURE - AUFBAU - ESTRUCTURA - STRUCTURE

[EN] **TUBE:** natural and synthetic rubber.

REINFORCEMENT: high tensile synthetic textile.

COVER: weather resistant synthetic rubber.

SURFACE: smooth with fabric impression.

[DE] **SEELE:** natur- und synthetischer gummi

EINLAGE: hochzugfeste synthetische einlage

DECKE: wetter- und abriebfester synthetischer gummi.

OBERFLÄCHE: stoffimpression

[ES] **SUSTRATO:** caucho natural y sintético.

REFUERZO: inserciones textiles con alta resistencia

COBERTURA: en caucho sintético resistente a los agentes atmosféricos.


SUPERFICIE: con impresión de tela

[FR] **TUBE:** caoutchouc naturel et synthétique.

REINFORCEMENT: insertion textile haute tenacité

RETEMENT: caoutchouc synthétique résistant aux agents atmosphériques.

SURFACE: impression textile

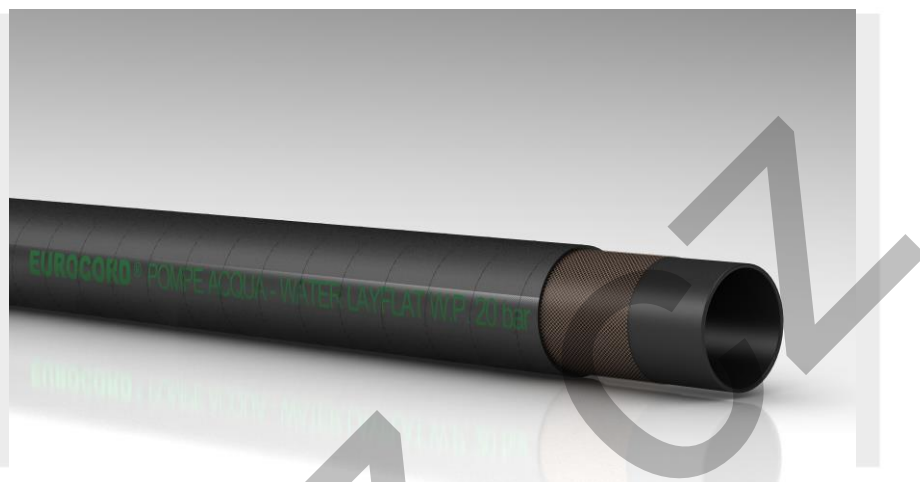

mm	mm	bar	bar	bar	gr/mt	mm	mt
25	36	20	60	-	714	-	40
30	40	20	60	-	747	-	40
32	42	20	60	-	782	-	40
40	50	20	60	-	945	-	40
42	52	20	60	-	998	-	40
45	55	20	60	-	1053	-	40
48	58	20	60	-	1080	-	40
50	60	20	60	-	1100	-	40
60	69	20	60	-	1274	-	40
70	79	20	60	-	1650	-	40
75	84	20	60	-	1717	-	40
80	90	20	60	-	1796	-	20/40
90	102	20	60	-	2444	-	20
102	113	20	60	-	2538	-	20/40
120	131	20	60	-	2930	-	20
153	164	20	60	-	3672	-	20



RECOMMENDED CLAMP/COLLAR - EMPFOHLENE KLAMMER/KRAGEN - ABRAZADERA/COLLAR RECOMENDADO - COLLIER/COLLIER RECOMMANDÉ

STF – hose clamp with screw / STC – hose clamp with bolt/ BANDI BLOCK – tightening torque



-25°C / +70°
-13°F / +158°F



NORMS: ISO 1307

MARKING: EUROCORD® WATER FLAT HOSE W.P. 10 BAR