

FLATCONN PVC L




APPLICATION - ANWENDUNG - USO - APPLICATION

[EN] for light duty discharge of water in agriculture and industry.

[DE] für leichte verwendungen zur beförderung von wasser/abwässern in landwirtschaften und industrien.

[ES] para suministro de uso ligero de agua en agricultura e industria

[FR] refoulement d'eau dans l'industrie et l'agriculture.

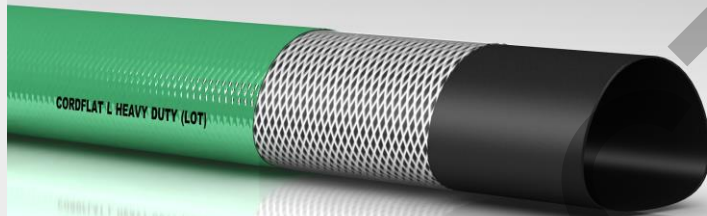

STRUCTURE - AUFBAU - ESTRUCTURA - STRUCTURE

[EN] **Construction:** flexible pvc/nbr lining. High tensile synthetic textile.

Cover: light chemicals and weather resistant pvc outer cover.

[DE] **Konstruktion:** flexible pvc/nbr seele. Hochfestes synthetisches textiltgewebe.

Decke: witterungs- und leichte chemikalien beständige pvc decke.

[ES] **Construcción:** manguera plana en pvc/nbr para suministro. Inserciones textiles con alta resistencia.

Cobertura: externa en pvc, resistente a los agentes atmosféricos y a productos químicos ligeros.

[FR] **Construction:** tube lisse et flexible en pvc/nbr. **Insertion:** textile haute tenacite.

Revetement: surface lisse resistente aux agents atmospheriques et a la plupart des produits chimiques



RECOMMENDED CLAMP/COLLAR - EMPFOHLENE KLAMMER/KRAGEN - ABRAZADERA/COLLAR RECOMENDADO - COLLIER/COLLIER RECOMMANDÉ

STC – hose clamp with bolt
BANDI BLOCK – tightening
torque



-5°C / +60°C
+23°F / +140°F



NORM.: ISO 1307

mm	bar	bar	gr/mt	mt
25	5	15	170	100
32	5	15	200	100
38	5	14	240	100
40	5	13	250	100
45	5	13	260	100
50	5	12	270	100
55	5	12	320	100
60	5	12	340	100
63	5	12	360	100
70	4	9	400	100
76	4	9	430	100
80	4	9	450	100
90	4	9	530	100
100	3	8	620	100
150	2	6	1100	100