


GE-M(KEG) Male stud connector

Male short metric taper thread (DIN 3852-1, type C) / EO 24° cone end

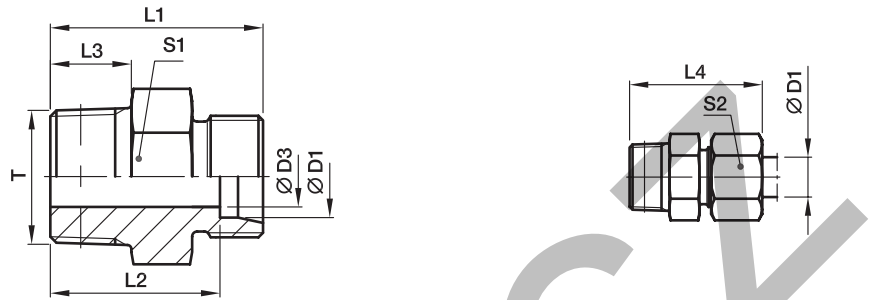

| Series | D1 | T | D3 | L1 | L2 | L3 | L4 | S1 | S2 | Weight g/1 piece | Order code* | PN (bar) ¹⁾ | | |
|------------------|----|---------------|-----|----|------|----|----|-----|----|---------------------|----------------------|------------------------|-----|----|
| | | | | | | | | | | | | Steel | 71 | MS |
| LL ²⁾ | 04 | M 06×1.0 tap. | 2.0 | 20 | 16.0 | 8 | 26 | 9* | 10 | 5 | GE04LLM6X1KEG | 100 | | |
| | 04 | M 08×1.0 tap. | 3.0 | 20 | 16.0 | 8 | 26 | 10* | 10 | 7 | GE04LLM | 100 | 100 | 63 |
| | 06 | M 10×1.0 tap. | 4.5 | 20 | 14.5 | 8 | 26 | 11* | 12 | 9 | GE06LLM | 100 | 100 | 63 |
| | 06 | M 08×1.0 tap. | 3.5 | 20 | 14.5 | 8 | 26 | 11* | 12 | 9 | GE06LLM8X1KEG | 100 | | |
| | 08 | M 10×1.0 tap. | 6.0 | 22 | 16.5 | 8 | 28 | 12* | 14 | 10 | GE08LLM | 100 | 100 | 63 |

¹⁾ Pressure shown = item deliverable

²⁾ LL = very light series

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Delivery without nut and ring. Information on ordering complete fittings see page 17.

*S1=SW12 in 1.4571

| Order code suffixes | | |
|---------------------|-----------------------------|------------|
| Material | Suffix surface and material | Example |
| Steel | CFX | GE06LLMCFX |
| Stainless Steel | 71X | GE06LLM71X |
| Brass | MSX | GE06LLMMSX |

*Please add the **suffixes** below according to the material/surface required.