


BBMTX Swivel nut female connector

Triple-Lok® 37° Flare fixed female end / Triple-Lok® 37° Flare female swivel end

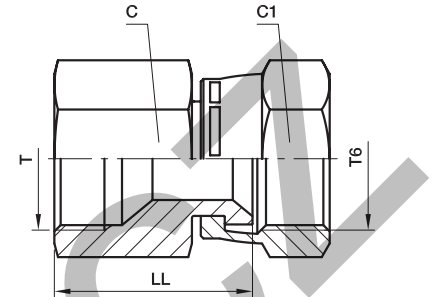

| Tube O.D. mm | Tube O.D. in. | Thread UN/UNF-2A T | Thread UN/UNF-2B T6 | C mm | C1 mm | LL mm | Weight (steel) g/1 piece | Triple-Lok® Steel | Triple-Lok® Stainless Steel | | PN (bar) | | |
|--------------------|---------------------|--------------------------|---------------------------|---------|----------|----------|--------------------------------|----------------------|--------------------------------|-----|----------|----|--|
| | | | | | | | | | S | SS | S | SS | |
| 6 | 1/4 | 7/16-20 | 7/16-20 | 14 | 14 | 23.0 | 25 | 4BBMTXS | 4BBMTXSS | 500 | 350 | | |
| 8 | 5/16 | 1/2-20 | 1/2-20 | 17 | 17 | 25.5 | 32 | 5BBMTXS | 5BBMTXSS | 420 | 350 | | |
| 10 | 3/8 | 9/16-18 | 9/16-18 | 19 | 19 | 25.5 | 60 | 6BBMTXS | 6BBMTXSS | 350 | 350 | | |
| 12 | 1/2 | 3/4-16 | 3/4-16 | 22 | 22 | 32.0 | 87 | 8BBMTXS | 8BBMTXSS | 350 | 350 | | |
| 14, 15, 16 | 5/8 | 7/8-14 | 7/8-14 | 27 | 27 | 36.0 | 150 | 10BBMTXS | 10BBMTXSS | 350 | 350 | | |
| 18, 20 | 3/4 | 1 1/16-12 | 1 1/16-12 | 32 | 32 | 37.0 | 221 | 12BBMTXS | 12BBMTXSS | 350 | 350 | | |
| 25 | 1 | 1 5/16-12 | 1 5/16-12 | 41 | 38 | 42.0 | 348 | 16BBMTXS | 16BBMTXSS | 250 | 250 | | |
| 28, 30, 32 | 1 1/4 | 1 5/8-12 | 1 5/8-12 | 50 | 50 | 47.0 | 955 | 20BBMTXS | 20BBMTXSS | 250 | 210 | | |
| 35, 38 | 1 1/2 | 1 7/8-12 | 1 7/8-12 | 60 | 60 | 54.0 | 1031 | 24BBMTXS | 24BBMTXSS | 170 | 140 | | |

Order codes shown are part of our current manufacturing programme.
Imperial and metric parts may vary in hexagon dimensions.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.