


## GMTX Female connector

Triple-Lok® 37° Flare end / Female NPTF\* thread (SAE J476)

SAE 070103 MS51503

\*Stainless Steel = NPT to prevent galling

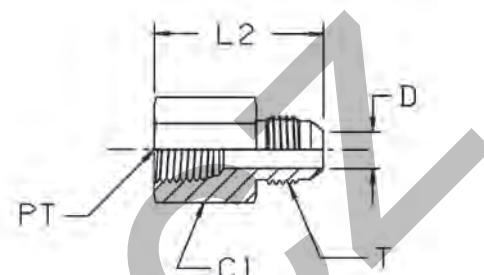

Tube O.D.		Thread NPT/NPTF PT	Thread UN/UNF-2A T	C1 mm	D mm	L2 mm	Weight (steel) g/1 piece	Triple-Lok®		PN (bar)	
mm	in.							Steel	Stainless Steel	S	SS
2	1/8	1/8-27	5/16-24	14.3	1.6	28.0	18	<b>2 GTX-S</b>		420	
6	1/4	1/8-27	7/16-20	14.3	4.4	30.0	42	<b>4 GTX-S</b>	<b>4GMTXSS</b>	420	350
6	1/4	1/4-18	7/16-20	19.0	4.4	35.0	40	<b>4-4 GTX-S</b>	<b>4-4GMTXSS</b>	420	350
8	5/16	1/8-27	1/2-20	14.3	6.0	30.0	40	<b>5 GTX-S</b>	<b>5GMTXSS</b>	420	350
8	5/16	1/4-18	1/2-20	19.0	6.0	35.5	42	<b>5-4 GTX-S</b>	<b>5-4GMTXSS</b>	420	350
10	3/8	1/4-18	9/16-18	19.0	7.5	36.0	40	<b>6 GTX-S</b>	<b>6GMTXSS</b>	420	350
10	3/8	3/8-18	9/16-18	22.3	7.5	37.0	62	<b>6-6 GTX-S</b>	<b>6-6GMTXSS</b>	420	350
10	3/8	1/2-14	9/16-18	22.3	7.5	43.0	90	<b>6-8 GTX-S</b>	<b>6-8GMTXSS</b>	350	350
12	1/2	3/8-18	3/4-16	22.3	9.9	40.0	45	<b>8 GTX-S</b>	<b>8GMTXSS</b>	420	350
12	1/2	1/4-18	3/4-16	20.6	9.9	36.0	80	<b>8-4 GTX-S</b>	<b>8-4GMTXSS</b>	420	350
12	1/2	1/2-14	3/4-16	28.6	9.9	46.0	116	<b>8-8 GTX-S</b>	<b>8-8GMTXSS</b>	350	350
12	1/2	3/4-14	3/4-16	35.0	9.9	47.0	150	<b>8-12 GTX-S</b>	<b>8-12GMTXSS</b>	280	280
14, 15,16	5/8	1/2-14	7/8-14	28.6	12.3	48.0	121	<b>10 GTX-S</b>	<b>10GMTXSS</b>	350	350
14, 15,16	5/8	3/4-14	7/8-14	35.0	12.3	50.0	182	<b>10-12 GTX-S</b>	<b>10-12GMTXSS</b>	280	280
18, 20	3/4	3/4-14	1 1/16-12	35.0	15.5	52.0	188	<b>12 GTX-S</b>	<b>12GMTXSS</b>	280	280
18, 20	3/4	1/2-14	1 1/16-12	28.6	15.5	52.0	133	<b>12-8 GTX-S</b>	<b>12-8GMTXSS</b>	350	350
25	1	1-11.5	1 5/16-12	41.3	21.4	60.0	280	<b>16 GTX-S</b>	<b>16GMTXSS</b>	210	210
28, 30, 32	1 1/4	1 1/4-11.5	1 5/8-12	51.0	27.4	63.0	408	<b>20 GTX-S</b>	<b>20GMTXSS</b>	170	170
35, 38	1 1/2	1 1/2-11.5	1 7/8-12	60.3	33.3	67.0	370	<b>24 GTX-S</b>	<b>24GMTXSS</b>	140	140

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

K