


V6LO 45° Swivel nut elbow

O-Lok® ORFS female swivel end / O-Lok® ORFS tube end

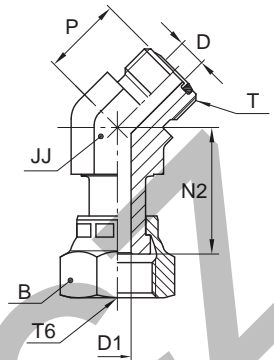

*JJ – Across wrench flats

| Tube O.D. | | Thread UN/UNF-2A T | Thread UN/UNF-2B T6 | B mm | D mm | D1 mm | JJ* mm | N2 mm | P mm | Weight (steel) g/1 piece | O-Lok® Steel | PN (bar) |
|------------|-----------|--------------------|---------------------|------|------|-------|--------|-------|------|--------------------------|------------------|----------|
| 6 | 1/4 | 9/16-18 | 9/16-18 | 18 | 4.5 | 4.0 | 14 | 25 | 16 | 44 | 4 V6LO-S | 500 |
| 8, 10 | 5/16, 3/8 | 11/16-16 | 11/16-16 | 22 | 6.5 | 6.5 | 19 | 30 | 19 | 96 | 6V6MLOS | 630 |
| 12 | 1/2 | 13/16-16 | 13/16-16 | 24 | 9.5 | 9.0 | 19 | 38 | 20 | 110 | 8 V6LO-S | 630 |
| 14, 15, 16 | 5/8 | 1-14 | 1-14 | 30 | 12.5 | 11.5 | 27 | 42 | 23 | 235 | 10V6MLOS | 420 |
| 18, 20 | 3/4 | 1 3/16-12 | 1 3/16-12 | 36 | 15.5 | 14.0 | 30 | 46 | 26 | 349 | 12V6MLOS | 420 |
| 22, 25 | 1 | 1 7/16-12 | 1 7/16-12 | 41 | 20.5 | 20.0 | 36 | 48 | 30 | 300 | 16 V6LO-S | 420 |
| 28, 30, 32 | 1 1/4 | 1 11/16-12 | 1 11/16-12 | 48 | 26.0 | 26.0 | 41 | 50 | 32 | 444 | 20 V6LO-S | 350 |
| 35, 38 | 1 1/2 | 2-12 | 2-12 | 57 | 32.0 | 32.0 | 48 | 52 | 37 | 568 | 24 V6LO-S | 280 |

Product delivered with NBR TRAP seal. Replacement of TRAP seal is with a standard NBR O-ring – see page J73-J74.

Part numbers shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$$\frac{PN \text{ (bar)}}{10} = PN \text{ (MPa)}$$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

*JJ may vary in stainless steel