


## EVW-M Assembled adjustable standpipe elbow

EO 24° cone end / Male metric thread – metal sealing edge (ISO 9974)

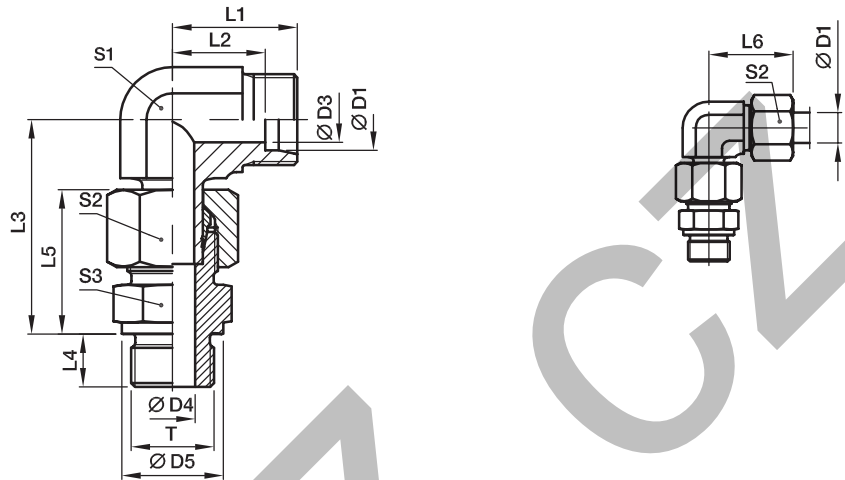

Pre-assembled, complete with straight male stud connector (with cutting face DIN 3852, type B). Final assembly (in appropriate body) at least 1/4 turn beyond the point of clearly perceptible resistance.

| Series          | D1 | T        | D3 | D4 | D5 | L1 | L2   | L3   | L4 | L5 | L6 | S1 | S2 | S3 | Weight<br>g/1 piece | Order code* | PN (bar) <sup>1)</sup> |     |
|-----------------|----|----------|----|----|----|----|------|------|----|----|----|----|----|----|---------------------|-------------|------------------------|-----|
|                 |    |          |    |    |    |    |      |      |    |    |    |    |    |    |                     |             | Steel                  | 71  |
| L <sup>3)</sup> | 06 | M 10×1.0 | 4  | 4  | 14 | 19 | 12.0 | 34.5 | 8  | 23 | 27 | 12 | 14 | 14 | 41                  | EVW06LMOMD  | 315                    | 315 |
|                 | 08 | M 12×1.5 | 6  | 6  | 17 | 21 | 14.0 | 37.5 | 12 | 25 | 29 | 12 | 17 | 17 | 63                  | EVW08LMOMD  | 315                    | 315 |
|                 | 10 | M 14×1.5 | 8  | 7  | 19 | 22 | 15.0 | 40.0 | 12 | 26 | 30 | 14 | 19 | 19 | 83                  | EVW10LMOMD  | 315                    | 315 |
|                 | 12 | M 16×1.5 | 10 | 9  | 21 | 24 | 17.0 | 42.0 | 12 | 27 | 32 | 17 | 22 | 22 | 107                 | EVW12LMOMD  | 315                    | 315 |
|                 | 15 | M 18×1.5 | 12 | 11 | 23 | 28 | 21.0 | 46.0 | 12 | 29 | 36 | 19 | 27 | 24 | 170                 | EVW15LMOMD  | 250                    | 250 |
|                 | 18 | M 22×1.5 | 15 | 14 | 27 | 31 | 23.5 | 50.0 | 14 | 31 | 40 | 24 | 32 | 27 | 265                 | EVW18LMOMD  | 250                    | 250 |
|                 | 22 | M 26×1.5 | 19 | 18 | 31 | 35 | 27.5 | 55.0 | 16 | 33 | 44 | 27 | 36 | 32 | 355                 | EVW22LMOMD  | 160                    | 160 |
|                 | 28 | M 33×2.0 | 24 | 23 | 39 | 38 | 30.5 | 59.5 | 18 | 34 | 47 | 36 | 41 | 41 | 514                 | EVW28LMOMD  | 160                    | 160 |
|                 | 35 | M 42×2.0 | 30 | 30 | 49 | 45 | 34.5 | 68.5 | 20 | 39 | 56 | 41 | 50 | 50 | 791                 | EVW35LMOMD  | 160                    | 160 |
|                 | 42 | M 48×2.0 | 36 | 36 | 55 | 51 | 40.0 | 79.0 | 22 | 42 | 63 | 50 | 60 | 55 | 1153                | EVW42LMOMD  | 160                    | 160 |
| S <sup>4)</sup> | 06 | M 12×1.5 | 4  | 4  | 17 | 23 | 16.0 | 40.0 | 12 | 28 | 31 | 12 | 17 | 17 | 73                  | EVW06SMOMD  | 400                    | 400 |
|                 | 08 | M 14×1.5 | 5  | 5  | 19 | 24 | 17.0 | 42.5 | 12 | 30 | 32 | 14 | 19 | 19 | 100                 | EVW08SMOMD  | 400                    | 400 |
|                 | 10 | M 16×1.5 | 7  | 7  | 21 | 25 | 17.5 | 46.0 | 12 | 31 | 34 | 17 | 22 | 22 | 133                 | EVW10SMOMD  | 400                    | 400 |
|                 | 12 | M 18×1.5 | 8  | 8  | 23 | 29 | 21.5 | 48.0 | 12 | 33 | 38 | 17 | 24 | 24 | 174                 | EVW12SMOMD  | 400                    | 400 |
|                 | 16 | M 22×1.5 | 12 | 12 | 27 | 33 | 24.5 | 56.0 | 14 | 37 | 43 | 24 | 30 | 27 | 309                 | EVW16SMOMD  | 400                    | 400 |
|                 | 20 | M 27×2.0 | 16 | 16 | 32 | 37 | 26.5 | 65.0 | 16 | 42 | 48 | 27 | 36 | 32 | 429                 | EVW20SMOMD  | 400                    | 400 |
|                 | 25 | M 33×2.0 | 20 | 20 | 39 | 42 | 30.0 | 73.0 | 18 | 47 | 54 | 36 | 46 | 41 | 826                 | EVW25SMOMD  | 250                    | 250 |
|                 | 30 | M 42×2.0 | 25 | 25 | 49 | 49 | 35.5 | 78.5 | 20 | 50 | 62 | 41 | 50 | 50 | 1132                | EVW30SMOMD  | 160                    | 160 |
|                 | 38 | M 48×2.0 | 32 | 32 | 55 | 57 | 41.0 | 92.5 | 22 | 57 | 72 | 50 | 60 | 55 | 1874                | EVW38SMOMD  | 160                    | 160 |

<sup>1)</sup> Pressure shown = item deliverable

<sup>3)</sup> L = light series; <sup>4)</sup> S = heavy series

$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$

Delivery without nut and ring. Information on ordering complete fittings see page 17.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes |                             |              |
|---------------------|-----------------------------|--------------|
| Material            | Suffix surface and material | Example      |
| Steel               | CF                          | EVW16SMOMDCF |
| Stainless Steel     | 71                          | EVW16SMOMD71 |