


MRO Male female thread tee

Male NPTF* thread (SAE J476) / Female NPTF* thread (SAE J476)

SAE 140424

*Stainless Steel = NPT to prevent galling

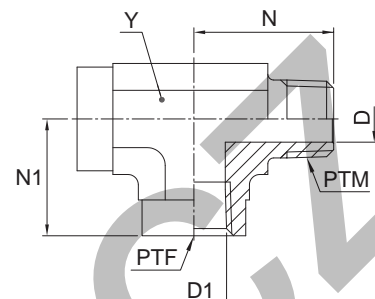

| Thread NPT/NPTF PTM | Thread NPT/NPTF PTF | D mm | D1 mm | N mm | N1 mm | Y mm | Weight (steel) g/1 piece | Adapter Steel | Adapter Stainless Steel | PN (bar) | |
|---------------------------|---------------------------|---------|----------|---------|----------|---------|--------------------------------|------------------|----------------------------|----------|-----|
| | | | | | | | | | | S | SS |
| 1/8-27 | 1/8-27 | 4.8 | 8.3 | 20 | 17 | 14.0 | 59 | 1/8 MRO-S | 1/8 MRO-SS | 350 | 350 |
| 1/4-18 | 1/4-18 | 7.1 | 10.7 | 28 | 22 | 19.0 | 115 | 1/4 MRO-S | 1/4 MRO-SS | 350 | 350 |
| 3/8-18 | 3/8-18 | 10.3 | 14.2 | 31 | 26 | 22.0 | 122 | 3/8 MRO-S | 3/8 MRO-SS | 310 | 310 |
| 1/2-14 | 1/2-14 | 13.5 | 17.5 | 37 | 31 | 27.0 | 285 | 1/2 MRO-S | 1/2 MRO-SS | 210 | 210 |
| 3/4-14 | 3/4-14 | 18.3 | 22.8 | 40 | 35 | 33.3 | 497 | 3/4 MRO-S | 3/4 MRO-SS | 210 | 210 |
| 1-11.5 | 1-11.5 | 23.8 | 28.6 | 50 | 41 | 41.0 | 987 | 1 MRO-S | 1 MRO-SS | 125 | 120 |

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.