


BTX Nut

Triple-Lok® 37° Flare end nut
SAE 070110 MS51531

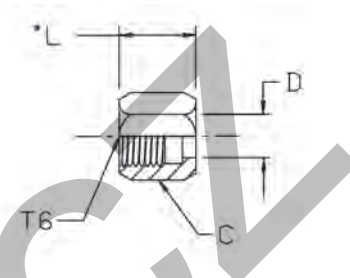

| Tube O.D. mm | Tube O.D. in. | Thread UN/UNF-2B T6 | C in. | D mm | L mm | Weight (steel) g/1 piece | Triple-Lok® | Triple-Lok® | Triple-Lok® |
|----------------------|---------------------|---------------------------|----------|---------|---------|--------------------------------|-------------|-----------------|-------------|
| | | | | | | | Steel | Stainless Steel | Brass |
| 6 | 1/8 | 5/16-24 | 3/8 | 4.5 | 14.0 | 6 | 2 BTX-S | 2 BTX-SS | 2 BTX-B |
| | 3/16 | 3/8-24 | 7/16 | 6.0 | 15.5 | 8 | 3 BTX-S | 3 BTX-SS | 3 BTX-B |
| | 1/4 | 7/16-20 | 9/16 | 8.0 | 16.0 | 11 | 4 BTX-S | 4 BTX-SS | 4 BTX-B |
| | 5/16 | 1/2-20 | 5/8 | 9.5 | 17.0 | 14 | 5 BTX-S | 5 BTX-SS | 5 BTX-B |
| | 3/8 | 9/16-18 | 11/16 | 11.0 | 18.5 | 18 | 6 BTX-S | 6 BTX-SS | 6 BTX-B |
| 14, 15, 16 | 1/2 | 3/4-16 | 7/8 | 14.5 | 21.5 | 29 | 8 BTX-S | 8 BTX-SS | 8 BTX-B |
| | 5/8 | 7/8-14 | 1 | 18.0 | 25.0 | 54 | 10 BTX-S | 10 BTX-SS | 10 BTX-B |
| | 3/4 | 1 1/16-12 | 1 1/4 | 21.0 | 26.0 | 73 | 12 BTX-S* | 12 BTX-SS* | 12 BTX-B* |
| | 7/8 | 1 3/16-12 | 1 3/8 | 24.0 | 27.5 | 100 | 14 BTX-S | 14 BTX-SS | 14 BTX-B |
| | 1 | 1 5/16-12 | 1 1/2 | 27.5 | 28.5 | 104 | 16 BTX-S | 16 BTX-SS | 16 BTX-B |
| 28, 30, 32 35, 38 | 1 1/4 | 1 5/8-12 | 2 | 34.0 | 31.0 | 240 | 20 BTX-S | 20 BTX-SS | 20 BTX-B |
| | 1 1/2 | 1 7/8-12 | 2 1/4 | 41.0 | 36.0 | 325 | 24 BTX-S | 24 BTX-SS | 24 BTX-B |
| | 2 | 2 1/2-12 | 2 7/8 | 55.0 | 44.5 | 549 | 32 BTX-S | 32 BTX-SS | 32 BTX-B |

Order codes shown are part of our current manufacturing programme.

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

***Size 12 BTX-S cannot be used with the metric tube sleeve TXS20 or 20 mm tubes.
This applies to steel, stainless steel and brass.**