


## EVT-R Assembled adjustable standpipe branch tee

EO 24° cone end / Male BSPP thread – metal sealing edge (ISO 1179)

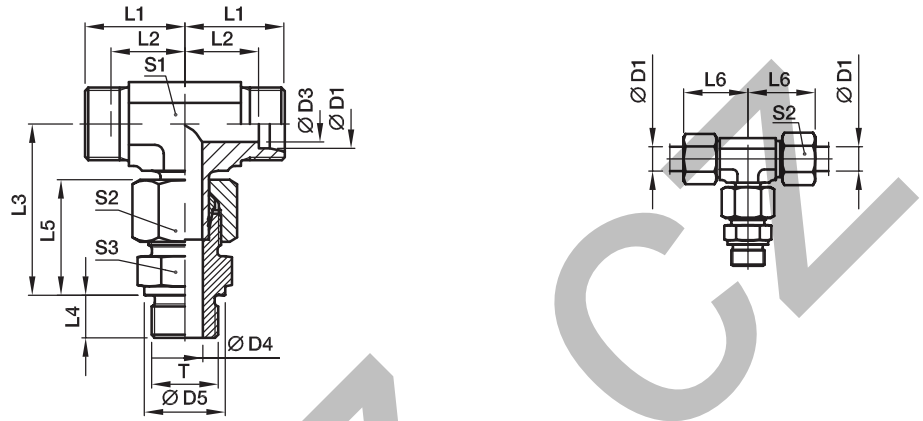

Pre-assembled, complete with straight male stud connector (with cutting face). Final assembly (in appropriate body) at least 1/4 turn beyond the point of clearly perceptible resistance.

| Series          | D1 | T         | D3 | D4 | D5 | L1 | L2   | L3   | L4 | L5 | L6 | S1 | S2 | S3 | Weight<br>g/1 piece | Order code*       | PN (bar) <sup>1)</sup> |     |
|-----------------|----|-----------|----|----|----|----|------|------|----|----|----|----|----|----|---------------------|-------------------|------------------------|-----|
|                 |    |           |    |    |    |    |      |      |    |    |    |    |    |    |                     |                   | Steel                  | 71  |
| L <sup>3)</sup> | 06 | G 1/8 A   | 4  | 4  | 14 | 19 | 12.0 | 34.5 | 8  | 23 | 27 | 12 | 14 | 14 | 48                  | <b>EVT06LROMD</b> | 315                    | 315 |
|                 | 08 | G 1/4 A   | 6  | 6  | 18 | 21 | 14.0 | 37.5 | 12 | 25 | 29 | 12 | 17 | 19 | 73                  | <b>EVT08LROMD</b> | 315                    | 315 |
|                 | 10 | G 1/4 A   | 8  | 6  | 18 | 22 | 15.0 | 40.0 | 12 | 26 | 30 | 14 | 19 | 19 | 85                  | <b>EVT10LROMD</b> | 315                    | 315 |
|                 | 12 | G 3/8 A   | 10 | 9  | 22 | 24 | 17.0 | 43.0 | 12 | 27 | 32 | 17 | 22 | 22 | 118                 | <b>EVT12LROMD</b> | 315                    | 315 |
|                 | 15 | G 1/2 A   | 12 | 11 | 26 | 28 | 21.0 | 46.5 | 14 | 29 | 36 | 19 | 27 | 27 | 206                 | <b>EVT15LROMD</b> | 250                    | 250 |
|                 | 18 | G 1/2 A   | 15 | 14 | 26 | 31 | 23.5 | 50.0 | 14 | 31 | 40 | 24 | 32 | 27 | 267                 | <b>EVT18LROMD</b> | 250                    | 250 |
|                 | 22 | G 3/4 A   | 19 | 18 | 32 | 35 | 27.5 | 55.5 | 16 | 33 | 44 | 27 | 36 | 32 | 367                 | <b>EVT22LROMD</b> | 160                    | 160 |
|                 | 28 | G 1 A     | 24 | 23 | 39 | 38 | 30.5 | 61.0 | 18 | 34 | 47 | 36 | 41 | 41 | 565                 | <b>EVT28LROMD</b> | 160                    | 160 |
|                 | 35 | G 1 1/4 A | 30 | 30 | 49 | 45 | 34.5 | 72.0 | 20 | 39 | 56 | 41 | 50 | 50 | 901                 | <b>EVT35LROMD</b> | 160                    | 160 |
|                 | 42 | G 1 1/2 A | 36 | 36 | 55 | 51 | 40.0 | 79.0 | 22 | 42 | 63 | 50 | 60 | 55 | 1277                | <b>EVT42LROMD</b> | 160                    | 160 |
| S <sup>4)</sup> | 06 | G 1/4 A   | 4  | 4  | 18 | 23 | 16.0 | 40.0 | 12 | 28 | 31 | 12 | 17 | 19 | 90                  | <b>EVT06SROMD</b> | 400                    | 400 |
|                 | 08 | G 1/4 A   | 5  | 5  | 18 | 24 | 17.0 | 44.0 | 12 | 30 | 32 | 14 | 19 | 19 | 116                 | <b>EVT08SROMD</b> | 400                    | 400 |
|                 | 10 | G 3/8 A   | 7  | 7  | 22 | 25 | 17.5 | 47.0 | 12 | 31 | 34 | 17 | 22 | 22 | 151                 | <b>EVT10SROMD</b> | 400                    | 400 |
|                 | 12 | G 3/8 A   | 8  | 8  | 22 | 29 | 21.5 | 50.0 | 12 | 33 | 38 | 17 | 24 | 22 | 190                 | <b>EVT12SROMD</b> | 400                    | 400 |
|                 | 16 | G 1/2 A   | 12 | 12 | 26 | 33 | 24.5 | 55.0 | 14 | 37 | 43 | 24 | 30 | 27 | 322                 | <b>EVT16SROMD</b> | 400                    | 400 |
|                 | 20 | G 3/4 A   | 16 | 16 | 32 | 37 | 26.5 | 65.0 | 16 | 42 | 48 | 27 | 36 | 32 | 500                 | <b>EVT20SROMD</b> | 400                    | 400 |
|                 | 25 | G 1 A     | 20 | 20 | 39 | 42 | 30.0 | 73.5 | 18 | 47 | 54 | 36 | 46 | 41 | 905                 | <b>EVT25SROMD</b> | 250                    | 250 |
|                 | 30 | G 1 1/4 A | 25 | 25 | 49 | 49 | 35.5 | 80.0 | 20 | 50 | 62 | 41 | 50 | 50 | 1275                | <b>EVT30SROMD</b> | 160                    | 160 |
|                 | 38 | G 1 1/2 A | 32 | 32 | 55 | 57 | 41.0 | 92.5 | 22 | 57 | 72 | 50 | 60 | 55 | 1920                | <b>EVT38SROMD</b> | 160                    | 160 |

<sup>1)</sup> Pressure shown = item deliverable

<sup>3)</sup> L = light series; <sup>4)</sup> S = heavy series

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Delivery without nut and ring. Information on ordering complete fittings see page 17.

\*Please add the **suffixes** below according to the material/surface required.

| Order code suffixes |                             |              |
|---------------------|-----------------------------|--------------|
| Material            | Suffix surface and material | Example      |
| Steel               | CF                          | EVT16SROMDCF |
| Stainless Steel     | 71                          | EVT16SROMD71 |