


TTP4ML Test point connector

O-Lok® ORFS female swivel end / EMA3 test point

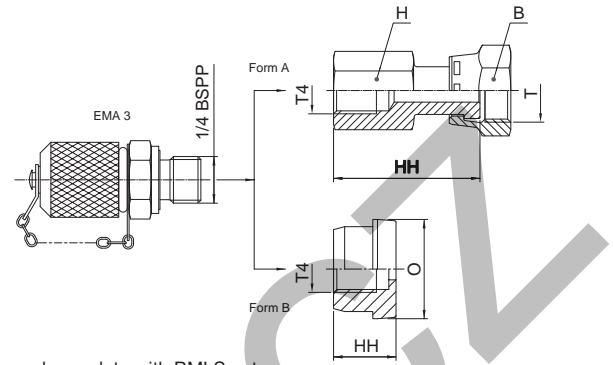

Form B versions delivered complete with BMLS nut.

| Thread UN/UNF-2B T | Thread BSPP T4 | O mm | B mm | H mm | HH mm | Weight (steel) g/1 piece | Form | O-Lok® Steel | PN (bar) |
|--------------------|----------------|------|------|------|-------|--------------------------|------|-----------------|----------|
| 9/16-18 | 1/4-19 | — | 17 | 19 | 38 | 150 | A | 4TTP4MLS | 420 |
| 11/16-16 | 1/4-19 | — | 22 | 19 | 41 | 164 | A | 6TTP4MLS | 420 |
| 13/16-16 | 1/4-19 | — | 24 | 19 | 43 | 181 | A | 8TTP4MLS | 420 |
| — | 1/4-19 | 23 | 30 | — | 18 | 120 | B | 10TTP4LS | 420 |
| — | 1/4-19 | 28 | 36 | — | 18 | 138 | B | 12TTP4LS | 420 |
| — | 1/4-19 | 34 | 41 | — | 18 | 185 | B | 16TTP4LS | 420 |
| — | 1/4-19 | 41 | 50 | — | 18 | 200 | B | 20TTP4LS | 280 |
| — | 1/4-19 | 49 | 60 | — | 18 | 279 | B | 24TTP4LS | 280 |

O-Lok® is delivered with NBR elastomeric seals as standard. For more details on other seal materials see page J73-J74.

Part numbers shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$$\frac{\text{PN (bar)}}{10} = \text{PN (MPa)}$$

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.