


**Lubricator**




**Symbols**



Lubricator with drain

- Integral 3/4 or 1" ports (BSPP & NPT)
- Robust but lightweight aluminium construction
- Proportional oil delivery over a wide range of air flows.
- Possible to fill under system pressure eliminating down time
- Large oil reservoir

**Options:**

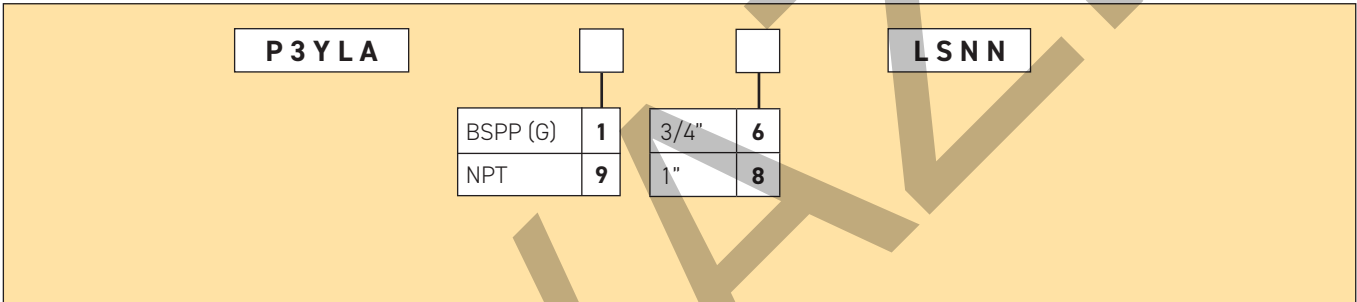

Port size	Description	Order Code	Flow dm <sup>3</sup> /s *	Max bar	Min temp °C	Max temp °C	Bowl capacity cm <sup>3</sup>	Height mm	Width mm	Depth mm	Weight kg
3/4"	Oil mist, fill under pressure	<b>P3YLA16LSNN</b>	148	17.5	-10	60	500	247	90	94	0.8
1"	Oil mist, fill under pressure	<b>P3YLA18LSNN</b>	184	17.5	-10	60	500	247	90	94	0.8

\* flow with 6,3 bar inlet pressure and 0,5 pressure drop.

**Technical Information**


Fluid:	Compressed air
Maximum inlet pressure*:	17.5 bar
Temperature range*:	-10°C to +60°C

\* Air supply must be dry enough to avoid ice formation at temperatures below +2° C  
 Low flow start point (lubrication pick-up): at 6.3bar inlet pressure 0.5 dm<sup>3</sup>/s  
 Typical flow with 6.3bar inlet pressure and 0.7 bar pressure drop: 184 dm<sup>3</sup>/s

**Material Specification**


Body:	Aluminium
Bowl sight glass:	Polypropylene
Sight dome:	Polyamide
Lubricator cover:	ABS
Bayonet support:	Nylon
Seals:	Nitrile NBR

**Dimensions (mm)**

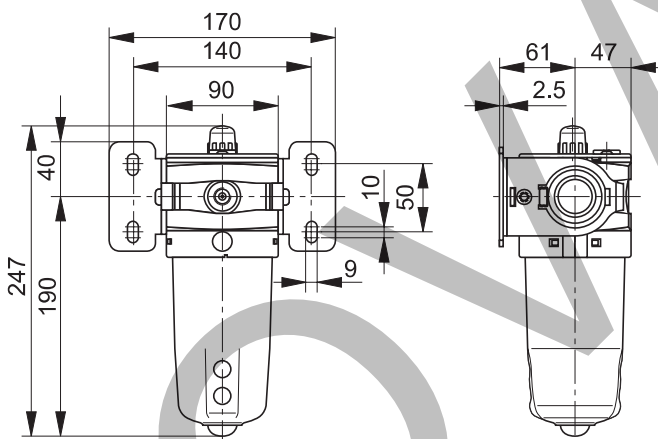


**Flow characteristics**

**(3/4") Lubricator**

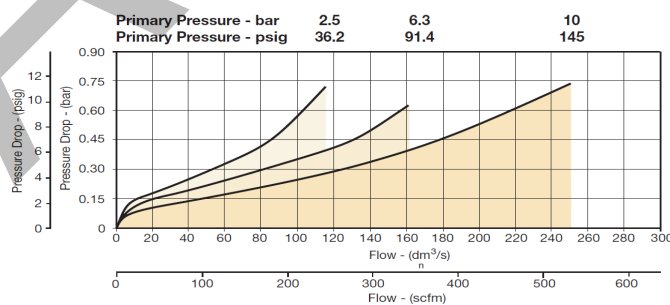

**(1") Lubricator**

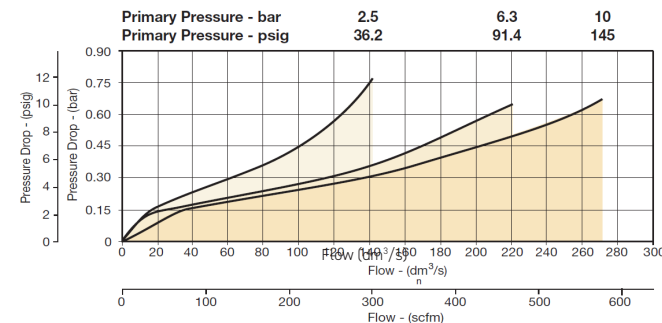

**Service kits**

Description	Order code
Bowl kit	<b>P3YKA00BSN</b>
Refill plug	<b>P3YKA00PL</b>
Lubricator Oil	<b>P3YKA00PPBB</b>