

# CRISTALSIL FDA




## APPLICATION - ANWENDUNG - USO - APPLICATION

[EN] Suitable for fluids in food industry

[DE] Geeignet für Flüssigkeiten in der Lebensmittelindustrie

[ES] Aptas para fluidos en la industria alimentaria

[FR] Pour fluides dans l'industrie alimentaire

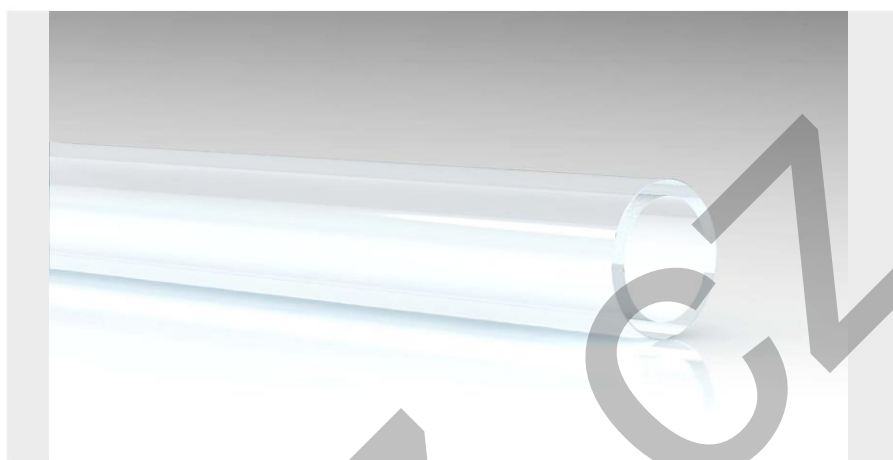

## STRUCTURE - AUFBAU - ESTRUCTURA - STRUCTURE

[EN] **Construction:** Neutral non toxic silicone hose.

**Cover:** Transparent silicon

[DE] **Konstruktion:** Neutral nicht toxischer Silikon Schlauch

**Decke:** Transparentes Silikon

[ES] **Construcción:** Manguera de silicona neutra no tóxica

**Cobertura:** Silicona transparente

[FR] **Construction:** Etre tuyau de silicone non toxical

**Revetement:** Silicón transparent.

mm	mm	gr/mt	mt
2	4	12	100
3	5	16	100
3	6	27	100
4	6	20	100
4	7	32	50
4	8	48	50
5	8	39	50
5	9	56	50
6	8	56	50
6	9	45	50
6	10	64	50
6	12	108	50
7	10	51	50
7	11	72	50
8	12	80	50
9	12	63	50
10	14	96	50
12	16	112	50
12	18	180	25
14	18	126	25



## RECOMMENDED CLAMP/COLLAR - EMPFOHLENE KLAMMER/KRAGEN - ABRAZADERA/COLLAR RECOMENDADO - COLLIER/COLLIER RECOMMANDÉ

STF – Hose clamp with screw  
SGT – Step less  
SBS – Double wire spring



-60°C / +150°C (picchi 200°)  
- 76°F / +302°F (peaks  
392°F)



**NORMS.:** F.D.A. cap. n. 21 CFR  
177.2600 al posto di REG. UE 10/2011