



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

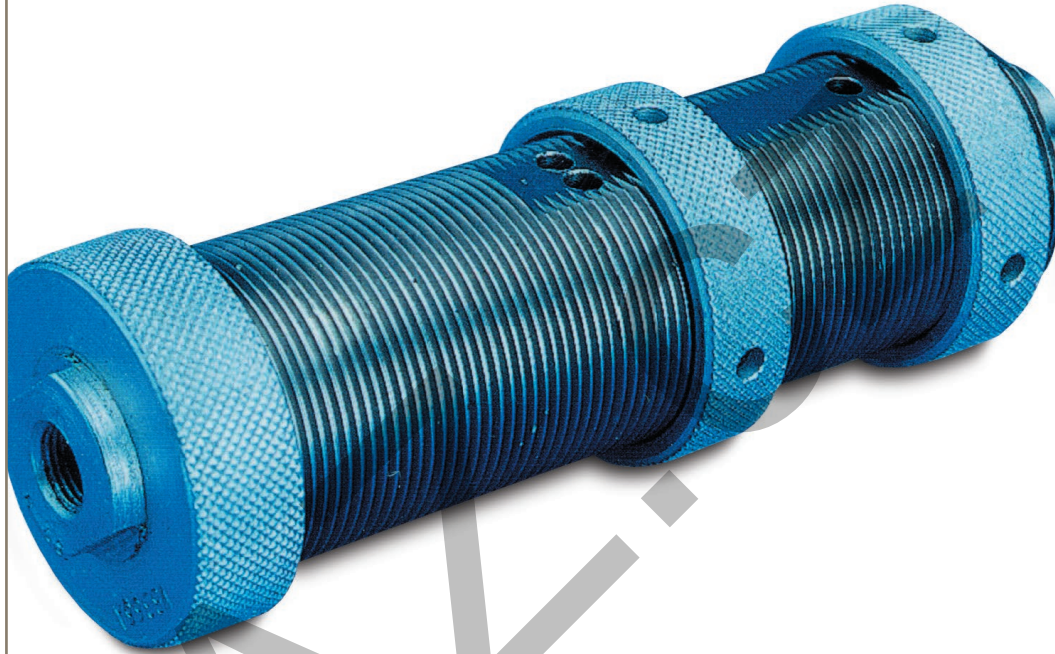


VB Hydraulic Clamp

Catalogue PDE2636TCUK September 2023

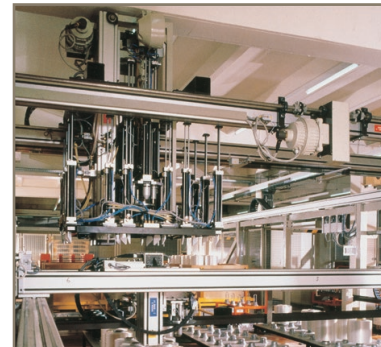


ENGINEERING YOUR SUCCESS.


VAZ.COM



Important !
Before carrying out any service work, ensure that the valve and manifold have been vented. Remove the primary supply air hose to ensure total disconnection of the air supply before dismantling valves or blank connection blocks.



NB !
All technical data in this catalogue is typical only.
The air quality is decisive for the valve life: see ISO 8573.



WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.


This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met. The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

SALE CONDITIONS

The items described in this document are available for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. Any sale contract entered into by Parker will be governed by the provisions stated in Parker's standard terms and conditions of sale (copy available upon request).

VB Hydraulic Clamp


Clamp cylinders are single acting pneumatic cylinders with built-in oleo-pneumatic intensifiers. They can be used to solve most clamping, tightening etc problems.




- Compact size for large forces (up to 2100 daN depending on the model and air pressure).
- Operated using a compressed air supply (no special installation required)
- Easy adjustment thanks to a fully threaded body
- Simple and rapid installation.




Clamping examples

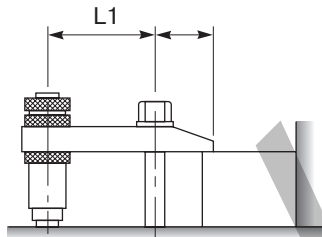


Clamping with intensified force
 $L1/L2 < 2$

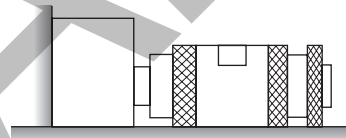

Horizontal clamping

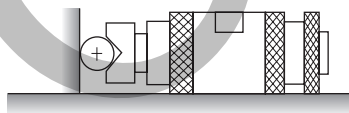

Clamping of cylindrical component
using V groove clamp end

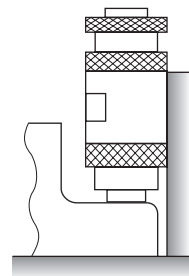

Vertical clamping

VB Hydraulic Clamp**Ordering references**

Order code	Max stroke (mm)	Ø external	Weight - g (lbs)
VB363C	3	36	570 (1.3)
VB366C	6	36	640 (1.4)
VB369C	9	36	890 (2.0)
VB483C	3	48	1050 (2.3)
VB486C	6	48	1350 (3.0)
VB489C	9	48	1152 (2.5)
VB4812C	12	48	1840 (4.0)
VBH483C	3	48	1240 (2.7)
VB606C	6	60	2360 (5.2)
VB609C	9	60	3120 (6.9)
VB6012C	12	60	3810 (8.4)
VBH603C	3	60	2360 (5.2)
VBH606C	6	60	3700 (8.1)

Seal kits

Seal kit for	VB Ø 36	VB Ø 48	VBH Ø 48	VB Ø 60	VBH Ø 60
Order Code	JJVB36	JJVB48	JJVBH48	JJVB60	JJVBH60

Oil container suitable for all types of cylinder (250 ml capacity)

Model No.: **BH680VB**

Technical data**Material specification**

Body	Nickel plated steel
Piston rod	Hardened steel
Locking rings	Zinc plated steel
End cap	Zinc plated steel
Seals	Nitrile

Operation

Temperature range	+5°C to +50°C (41°F to 122°F)
Storage temperature	-20°C to +60°C (-4°F to 140°F)
Pressure range	1 to 9 bar (15 to 130 psi) (except VBH603 and VBH606 : 7 bar (101psi max.)
Air condition	Filtered air 40µ lubricated or non lubricated

Maintenance

For all operations see our maintenance instructions
All safety requirements must be observed.

Technical data

Cylinder force

Note: The clamping time is given from the moment the clamp cylinder is pressurised to the time at when 90% of the clamping force is obtained, the cylinder completing a full stroke.


The release time is given from the moment the clamp cylinder starts to exhaust until the rod is fully retracted.

When the cylinder remains pressurised for more than 10 min. add 0,20 sec. to the release time.

These average times are given for information only. They will vary depending on the application and the cylinder inlet and exhaust circuits.

Order code	Max. stroke (mm)	Force at 6 bar daN (lbs)	Clamping time (s)	Release time (s)
VB363C	3	240 (540)	0,10	1,00
VB366C	6	240 (540)	0,15	1,30
VB369C	9	240 (540)	0,20	1,50
VB483C	3	530 (1190)	0,30	1,30
VB486C	6	530 (1190)	0,40	1,60
VB489C	9	530 (1190)	0,50	1,90
VB4812C	12	530 (1190)	0,60	2,20
VBH483C	3	1060 (2380)	0,50	0,70
VB606C	6	1140 (2560)	0,50	1,90
VB609C	9	1140 (2560)	0,60	2,30
VB6012C	12	1140 (2560)	0,70	2,50
VBH603C	3	1800 (4000)	0,50	0,70
VBH606C	6	1800 (4000)	0,60	1,05

Principle of operation

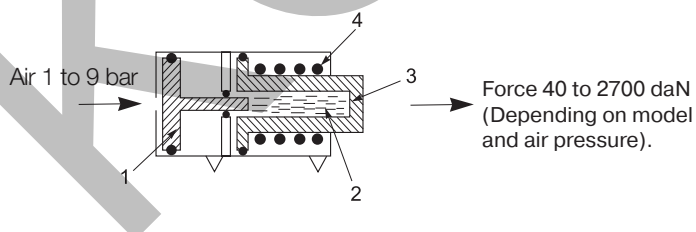

Air pressure applied to the pneumatic piston (1) causes the plunger to displace the enclosed oil in the hydraulic section of the cylinder (2). A high-pressure stroke results at the hydraulic piston (3) due to the differential areas of the two pistons.

The return of pistons (1) and (3) is caused by a return spring (4) when the air pressure is removed.


VB Hydraulic Clamp**Technical data****Working conditions**

Clamp cylinders must be installed so that the force is directed along the axis. (Take care that the exhaust ports are not blocked and that they are protected from swarf, cutting oil, dust, etc.)


Do not operate the cylinder at no-load. The clamp cylinder must always be operated in conjunction with a clamping fixture (clamp or block) to limit the stroke to within the maximum length specified in the ordering reference table.

We recommend an effective stroke equal to the max. length minus 1mm.

Please contact us for applications requiring force during part of the stroke (marking, crimping, punching, etc.) and high speeds.

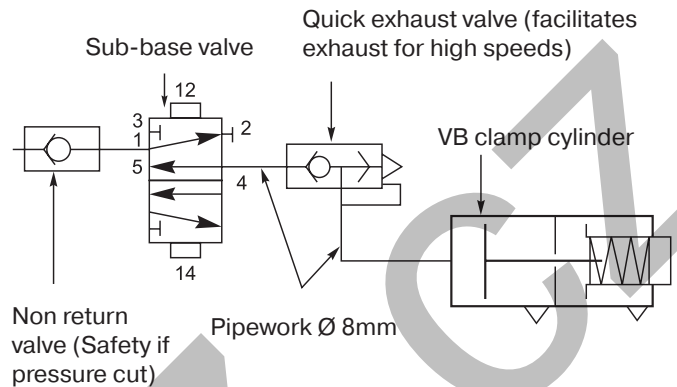**Pneumatic Circuit**

For correct use of clamp cylinders, we recommend applications of the circuit diagram opposite:

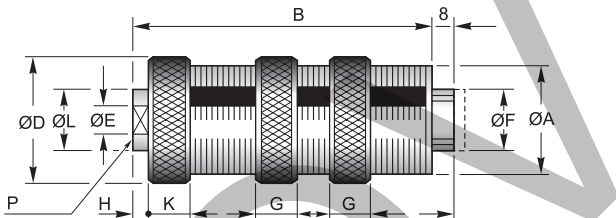Dimensions (mm)

Order code	ØA	B	ØD	ØE	ØF	G	H	K	ØL	P
VB363C	M36 x 1,5	98,0	42	G1/8	22	12	4	13	22	17
VB366C	M36 x 1,5	127,5	42	G1/8	22	12	4	13	22	17
VB369C	M36 x 1,5	185,0	42	G1/8	22	12	4	13	22	17
VB483C	M48 x 1,5	111,0	56	G1/8	32	12	4	13	22	17
VBH483C	M48 x 1,5	148,0	56	G1/8	32	12	4	13	22	17
VB486C	M48 x 1,5	148,0	56	G1/8	32	12	4	13	22	17
VB489C	M48 x 1,5	188,0	56	G1/8	32	12	4	13	22	17
VB4812C	M48 x 1,5	234,0	56	G1/8	32	12	4	13	22	17
VBH603C	M60 x 2	175,0	70	G1/4	40	14	5	17	25	22
VB606C	M60 x 2	175,0	70	G1/4	40	14	5	17	25	22
VBH606C	M60 x 2	290,0	70	G1/4	40	14	5	17	25	22
VB609C	M60 x 2	249,0	70	G1/4	40	14	5	17	25	22
VB6012C	M60 x 2	314,0	70	G1/4	40	14	5	17	25	22

KOLVANZ.CZ

Catalogue PDE2636TCUK May 2012

www.parker.com



European Headquarters
La Tuilière 6, 1163 Etoy,
Switzerland
Tel: +41 21 821 85 00

Your authorized Distributor