

Contamination Control Systems
Hose, Tube, Pipe Cleaning & Sealing

Applications for Hose, Tube & Pipe Cleaning Systems



Serving the Construction, Mining, Marine, Off-Shore, Hose and Tube Assembly markets, and many others....

Hydraulics Removes rubber dust and metal particles from the cutting process

on hydraulic hose. Removes metal flash from the crimping process on hose and tubes. Removal of contaminated oil from hoses, tubes and pipes in hydraulic systems. (Use the Ultra Clean System to reduce downtime, extend filter life and reduce the risk of failure and

premature wear due to CONTAMINATION!)

Pneumatics Eliminates rubber contamination, metal particles, contaminated oil

and moisture that causes breakdowns and inefficiency.

Heat Exchangers & Condensers Eliminates contamination that reduces heat transfer resulting in

low level performance.

Steam Boilers Removes most scaling in steam pipes for maintenance servicing.

Air Conditioning & Refrigeration Eliminates minute particles in copper tubes and coolant lines that

affect system performance.

Oxygen & Gas Eliminates oil, grease and other contaminants from copper or S/S

tubing.

Oil, Gas & Chemical Processing Efficient cleaning of product pipes as part of service maintenance.

Earthmoving Equipment Reduction in flushing time and filter usage.

Maintenance

Automotive & Servicing Cleaning of fuel lines and brake lines prior to assembly and

servicing of components.

Food & Beverage Product Recovery Retrieval of product from lines. Reducing or eliminating solvents

or detergents.

Gun Barrels To remove rust, scale or powder residue much faster than brushing

or swabbing.

Specific information available upon request.

Recommended Cleaning Procedures

Hose

When hydraulic hose is cut with metal-blade saws or abrasive wheels, tremendous heat is generated, causing rubber and metal particle and dust contaminants to stick to the hose or tube as they cool. It is vitally important to clean the hose immediately after the cutting process to avoid this. Fire one projectile in each direction through the length of the hose prior to installation of end connections. This will allow cleaning in the areas occupied by the insertion of the hose nozzle at either end. After crimping or swaging fittings, an Ultra Clean projectile should be fired through the entire hose assembly to remove metal flash. It is vital to apply Clean Seal Capsules to hose ends immediately after cleaning to avoid recontamination, and to protect hose threads.

Hydraulic Hose - Internal/External Skive

Before skiving, *two* (UC) Ultra Clean projectiles should be fired in each direction through the hose. If a mandrel is inserted into the ID of the hoses or tube for skiving purposes, the mandrel and mandrel lubricants must be clean and contamination free. It may be necessary to fire one or two UC or Tube Style Projectiles through the hose after the internal skiving process to remove rubber particles and lubricants. A custom Hose Nozzle to occupy the skived area may be necessary to achieve a higher level of cleanliness. After crimping or swaging fittings, a (UC) Ultra Clean Projectile should be fired through the entire hose assembly to remove metal flash. It is vital to apply Clean Seal Capsules to end fittings immediately following the last projectile to avoid recontamination, and to protect hose threads.

Used Hose & Tube Assemblies

Hydraulic hose and tube assemblies from systems that have experienced a failure need to have all contaminated oil removed. Disconnect each end of the assembly and secure one end into the Projectile Catcher (UC-PC). Fire air into the assembly without a projectile for several seconds to remove the excess contaminated hydraulic fluid. Fire 3 to 4 Ultra Clean Projectiles through assembly to remove particulates. Visibly check the last projectile for contamination. Repeat process until projectile has no signs of rubber or metallic particles on it. If the projectiles continue to show particles the hose may need to be replaced. This is a sign of a rubber tube that is failing.

Tube

When tubing requires cutting, the ends should be thoroughly deburred prior to use of the cleaning system. A tube nozzle and two Ultra Clean projectiles should be used to clean the tube. If the tube contains rust, weld slag or other corrosion inside, an abrasive projectile should be used first and as many times as necessary to remove the corrosion. Follow with an Ultra Clean projectile to insure proper cleanliness. If flaring is required, do so prior to cleaning. The use of a JIC nozzle is necessary to mate properly with a flared tubing end. If special fittings are used that require crimping, the use of an Ultra Clean projectile, in addition to the procedure described above, is recommended after the assembly is complete. The tube-style projectile should be used to remove mandrel lubricants, grease or oil if encountered. Tube-style projectiles are also recommended for stainless steal tubing.

Pipe

We recommend the Ultra Clean Scrub Projectile when rust is present, or an Abrasive Projectile for cleaning the inside of all types of carbon steel piping products. These projectiles may be used more than once if necessary, or until they wear out. After several passes with the Scrub or Abrasive Projectiles, an Ultra Clean Projectile should be fired through the pipe, removing debris left behind by previous projectiles. This can only be accomplished if the pipe has a relatively smooth surface. Our Scrub Projectiles will negotiate sweep elbows only. The Ultra Clean Projectile can also be soaked in corrosion inhibiting chemicals, effectively applying them 360 degrees to the inside surface as the projectile passes from one end to the other.

CLEAN EASYHose, Tube & Pipe Cleaning Systems



Ultra Clean Technologies offers a fast, less invasive way to clean contaminated hydraulic lines by shooting a projectile through the hose or tube assembly with a pneumatic launcher. The Ultra Clean Projectile strips out internal contamination, removing dirt, gunk and oil. Now your clean oil will stay clean as it reaches expensive components, preventing failure and system downtime.

Hand Held Launchers & Kits
Accessories
Nozzles & Adapter Rings
Projectiles

Production Equipment

Bench Mount Launcher
Projectile Verification System (PVS)
Carousel AutoLoader
Marking Systems

Clean Easy with Ultra Clean!

Launchers & Kits

Our launchers enable unsurpassed cleaning and removal of contaminates from hoses, tubes or pipes! Launcher kits provide added value and cost savings!

Launcher Kits Details

- Launcher kits are pictured with appropriate launchers.
- Kits can be customized with approval and cost adjustments.
- See Launcher Kits Chart for details and contents of each kit, see Pages 12-13.

Air Requirements for All Launchers

- 80 PSI (5.5 Bar) minimum to 110 PSI (7.5 Bar) maximum.
- ½" ID air hose to ensure 55 SCFM (1.6 m³/min) air flow.
- 5 micron filter and regulator with gauge are strongly suggested!
- Clean, dry air must be used to comply with the Ultra Clean Technologies equipment warranty. We strongly suggest the UC-D1-Super-Dry Compressed Air Dryer, see
 Page 19.

UC-EL1.25 11/4" Economy Launcher



- Cleans 1/8" through 1 1/4" hose, tube or pipe.
- Quarter turn locking ring for easy nozzle change and projectile loading.
- Durable brass and aluminum internal parts, strong plastic handle and anodized aluminum firing head and locking ring.
- Effortless to operate because of its simplistic ergonomic design.
- Ideal for mobile and job site applications due to size & portability.
- Nozzles smaller than 1/4" are optional.
- Additional nozzles for JIC and tube applications available.
- For kits contents, see chart Pages 12-13.

UC-EL-8 Kit

1/4" - 11/4" (6mm - 32mm ID)



UC-EL-8-DP Kit

1/4" - 11/4" (6mm - 32mm ID)

Great starter kit for applications up to 11/4" ID!



UC-EL-13-MT Kit

6mm - 30mm Tube



UC-HL2 | 2" Launcher



- Cleans 1/8" through 2" hose, tube or pipe.
- Full Flow Quick Release Coupling and 360° Rotary Plug for proper air flow and non-fatigue operator use.
- Safety Release Bar locks faceplate into a closed position.
- Made of precision machined aluminum, and fully anodized for harsh environments and heavy use.
- Ideal for production hose, tube shops, mobile hose fabricators and job site applications due to simplistic design, size and portability.
- For kits contents, see chart Pages 12-13.

UC-HL-10-2 Kit

1/4" - 2" (6mm - 50mm ID)



UC-HL-25-2-Kit

1/4" - 2" (6mm - 50mm ID)



UC-HL-17-2MT Kit

6mm - 50mm Tube



UC-CAP Kit

1/4" - 2" (6mm - 50mm ID)

Great starter kit for applications up to 2" ID!

UC-CAP-NH includes a UC-NH25 Nozzle Holder in place of the Carrying Case.



UC-HL3.5 3½" Launcher



- Cleans \%" through 3\\frac{1}{2}" hose, tube or pipe.
- Full Flow Quick Release Coupling and unique 360° Rotary Plug for proper air flow and non-fatigue operator use.
- Launcher requires a UC-AR2 adapter ring for nozzles $\frac{1}{4}$ " and a UC-AR3 for nozzles $\frac{1}{2}$ " and 2". The unique UC-U55/90 Universal Nozzle $\frac{2}{8}$ " through $\frac{3}{2}$ " (55mm 90mm ID) does not require an adapter ring.
- Made from precision machined aluminum and fully anodized for harsh environments and heavy use.
- Ideal for production hose and tube shops, mobile hose fabricators and job site applications because of its simplistic design, size and portability.
- For kit contents, see chart Pages 12-13.



2 1/8" - 31/2" (55mm - 90mm ID)



UC-HL4.5 | 4½" Launcher



- Cleans \(\frac{1}{8} \)" through \(\frac{1}{2} \)" hose, tube or pipe.
- Includes UC-4.5LN aluminum locking nozzle.
- Supplied with a -8 SAE male flare and female swivel with ½" hose barb for correct SCFM air flow requirements.
- Capable of passing 50% more SCFM than our other launchers extremely important for applications above 3½" and long lengths of hose, tube or pipe.
- Made of precision machined aluminum and fully anodized for harsh environments and heavy use.
- Ideal for job site applications because of its simplistic design, size and portability.
- Capable of cleaning ½" through 3½" when combined with our adapter rings and nozzles using the UC-LR locking ring in place of the UC-4.5LN locking nozzle.
- For kit contents, see chart Pages 12-13.

UC-HL-1-4.5 Kit

3½" - 4½" (90mm - 114mm ID)



Launcher Kits

Part Number#	Description	UC-EL-8 14" - 11/4" (6mm - 32mm ID)	UC-EL-8-DP 1/4" - 11/4" (6mm - 32mm ID)	UC-EL13-MT 6mm - 30mm Tube	UC-HL-10-2 1/4" - 2" (6mm - 50mm ID)	UC-HL-25-2 1/4" - 2" (6mm - 50mm ID)	UC-CAP 1/4" - 2" (6mm - 50mm ID)	UC-CAP-NH /4"- 2" (6mm - 50mm ID)	UC-HL-17-2MT 6mm - 50mm Tube	UC-HL-1-3.5 21/6" - 31/2" (55mm - 90mm ID)	UC-HL-1-4.5 3½" - 4½ (90mm - 114mm ID)
UC-CC	Carrying Case	1	>	>	>	>	>		1	>	
UC-S	FREE Launcher Stand	1	>	>	>	>	>	1	1	>	1
UC-NH25	Nozzle Holder							*			
UC-EL1.25	1¼" (32mm) Economy Hand Held Launcher	1	*	•							
UC-HL2	2" (50mm) Hand Held Launcher				1	1	1	*	1		
UC-HL3.5	3½" (90mm) Hand Held Launcher									1	
UC-HL4.5	4½" (114.3mm) Hand Held Launcher										1
UC-AR1	Adapter Ring for UC-HL2 Launcher				1	1	1	1	1		
UC-AR2	Adapter Ring for UC-HL3.5 Launcher									1	1
UC-AR3	Adapter Ring for UC-HL3.5 Launcher									1	1
UC-AH05	Hose Nozzle 5mm (3/16")	0	0	0	0	0	0	0	0	0	0
UC-H06	Hose Nozzle 6mm (¼")	1	1	0	1	1	1	1	0	0	0
UC-H08	Hose Nozzle 8mm (5/16")		1	0	1	1	1	1	0	0	0
UC-H10	Hose Nozzle 10mm (3/8")		1	0	1	1	1	1	0	0	0
UC-H13	Hose Nozzle 13mm (½")	1	1	0	1	1	1	1	0	0	0
UC-H16	Hose Nozzle 16mm (5/8")	1	1	0	1	1	1	1	0	0	0
UC-H19	Hose Nozzle 19mm (¾")	1	1	0	1	1	1	1	0	0	0
UC-H25	Hose Nozzle 25mm (1")	1	1	0	1	1	1	1	0	0	0
UC-H32	Hose Nozzle 32mm (1¼")	1	1	0	1	1	1	1	0	0	0
UC-H38	Hose Nozzle 38mm (1½")				1	1	1	1	0	0	0
UC-H50	Hose Nozzle 50mm (2")				1	1	1	1	0	0	0
UC-T03	Tube Nozzle 3mm ($\frac{1}{8}$ ")	0	0	0	0	1	0	0	0	0	0
UC-J06	JIC Nozzle 6mm (¼")	0	0	0	0	1	1	1	0	0	0
UC-T06	Tube Nozzle 6mm (¼")	0	0	0	0	1	0	0	0	0	0
UC-T08	Tube Nozzle 8mm (5/16")	0	0	0	0	1	0	0	0	0	0
UC-J10	JIC Nozzle 10mm (¾")	0	0	0	0	1	1	1	0	0	0
UC-T10	Tube Nozzle 10mm (¾")	0	0	0	0	1	0	0	0	0	0
UC-J13/T13	JIC/Tube Nozzle 13mm (½")	0	0	0	0	1	1	1	0	0	0
UC-J16/T16	JIC/Tube Nozzle 16mm (5/8")	0	0	0	0	1	1	1	0	0	0
UC-J19/T19	JIC/Tube Nozzle 19mm (¾")	0	0	0	0	1	1	1	0	0	0

Launcher Kits

Part Number#	Description	UC-EL-8 /4" - 1 /4" (6mm - 32mm ID)	UC-EL-8-DP /4" - 1 /4" (6mm - 32mm ID)	UC-EL13-MT 6mm - 30mm Tube	UC-HL-10-2 1/4" - 2" (6mm - 50mm ID)	UC-HL-25-2 1/4" - 2" (6mm - 50mm ID)	UC-CAP 1/4" - 2" (6mm - 50mm ID)	UC-CAP-NH /4" - 2" (6mm - 50mm ID)	UC-HL-17-2MT 6mm - 50mm Tube	UC-HL-1-3.5 21/8" - 31/2" (55mm - 90mm ID)	UC-HL-1-4.5 3½" - 4½ (90mm - 114mm ID)
UC-T32	Tube Nozzle 32mm (1¼")	0	0	0	0	1	0	0	0	0	0
UC-J32/T25	JIC/Tube Nozzle 32/25mm (1¼" & 1")	0	0	0	0	1	1	1	0	0	0
UC-J38/T38	JIC/Tube Nozzle 38mm (1½")				0	1	1	¥	0	0	0
UC-J50/T50	JIC/Tube Nozzle 50mm (2")				0	1	1	1	0	0	0
UC-4FFORX	4 Flat Face O-Ring Style Nozzle 6mm (¼")	0	0	0	0	✓	1	~	0	0	О
UC-6X1.5	Tube Nozzle 6mm OD X 1.5mm Wall	0	0	1	0	0	0	0	1	0	0
UC-8X1.5	Tube Nozzle 8mm OD X 1.5mm Wall	0	0	1	0	0	0	0	1	0	0
UC-10X1.5	Tube Nozzle 10mm OD X 1.5mm Wall	0	0	1	0	0	0	0	1	0	0
UC-12X2.0	Tube Nozzle 12mm OD X 2.0mm Wall	0	0	1	0	0	0	0	1	0	0
UC-14X2.0	Tube Nozzle 14mm OD X 2.0mm Wall	0	0	1	0	0	0	0	1	0	0
UC-15X2.0	Tube Nozzle 15mm OD X 2.5mm Wall	O	0	*	0	0	0	0	1	0	0
UC-16X2.5	Tube Nozzle 16mm OD X 2.5mm Wall	0	0	1	0	0	0	0	1	0	0
UC-18X2.5	Tube Nozzle 18mm OD X 2.5mm Wall	0	0	1	0	0	0	0	1	0	0
UC-20X3.0	Tube Nozzle 20mm OD X 3.0mm Wall	0	0	1	0	0	0	0	1	0	0
UC-22X2.0	Tube Nozzle 22mm OD X 2.0mm Wall	0	0	1	0	0	0	0	1	0	0
UC-25X3.0	Tube Nozzle 25mm OD X 3.0mm Wall	0	0	1	0	0	0	0	1	0	0
UC-28X2.5	Tube Nozzle 28mm OD X 2.5mm Wall	0	0	1	0	0	0	0	1	0	0
UC-30X4.0	Tube Nozzle 30mm OD X 4.0mm Wall	0	0	1	0	0	0	0	>	0	0
UC-35X3.0	Tube Nozzle 35mm OD X 3.0mm Wall				0	0	0	0	1	0	0
UC-38X5.0	Tube Nozzle 38mm OD X 5.0mm Wall				0	0	0	0	1	0	0
UC-42X3.0	Tube Nozzle 42mm OD X 3.0mm Wall				0	0	0	0	1	0	0
UC-50X6.0	Tube Nozzle 50mm OD X 6.0mm Wall				0	0	0	0	1	0	0
UC-U55/90	Universal Nozzle 55mm/90mm (2½" - 3½")									✓	0
UC-LR	Locking Ring									1	1
UC-4.5LN	Alum Locking Nozzle 114.3mm (4½")										1
UC-PC	Projectile Catcher Bucket	0	1	0	0	0	1	1	0	0	0
UC-P1	UC Style Projectile Kit (11 bags) UC07 - UC40 (¼" - 1¼")	0	1	0	0	0	0	0	0	0	0
UC-P2	UC Style Projectile Kit (13 bags) UC07 - UC60 (¼" - 2")				0	0	1	1	0	0	0

Nozzles & Adapter Rings

A range of nozzles are available, allowing the Ultra Clean System to be used on different sizes and types of hose, tube and pipe, as well as coupling configurations. Custom nozzles can be designed upon request.



Hose Nozzles

The hose nozzle is inserted into the ID of the hose. Hose nozzles also work on pipe, heavy walled tubing and many coupling configurations. It is our most popular nozzle. Hose nozzles have the "UC-H" designation and are blue in color for easy identification.

Production Hose Nozzles

Production Hose Nozzles are aluminum with a hard coat blue anodized finish. They are available for hose sizes ¼" (6mm) through 1¼" (32mm). The primary application is production hose assembly cleaning when using a UC-BM1.25-G3 Bench Mount Launcher or the UC-CAL-MS Carousel Auto Loader.



UC-AH-Kit-BLUE

8 Aluminum Production Hose Nozzles ¼" thru 1¼".



Tube Nozzles (Nominal Inch)

Nominal inch tube nozzles have a stop on the inside that forms an airtight seal when the tube is fully inserted into the nozzle. Nominal inch tube nozzles are white in color and designated with a "UC-T" in the part number. Some "UC-T" nozzles may also be designated for IIC use as reflected in the part number.

The white JIC nozzles are molded with a special 37° male flare at the tip to fit the female JIC fittings on hose and tube assemblies. JIC nozzles are marked with the "UC-J" designation, followed by appropriate size.



Tube Nozzles (Metric)

Metric tube nozzles have a stop on the inside that forms an airtight seal when the tube is fully inserted into the nozzle. Metric tube nozzles are designed to match metric tubing, and are similarly based on outside diameter (OD) x wall thickness. Metric tube nozzle designations utilize the largest wall thickness for the given OD, but fit all smaller wall thicknesses as well. Metric tube nozzles are grey in color.

Custom Nozzles

Special nozzles are designed to accommodate various common fittings such as the -4 Flat Face O-Ring style (also referred to as "Face Seal," "Seal Lok," or "FFORX"), or the -6 FJIC style.



Universal Nozzle

UC-U55/90: The Universal Nozzle is similar to our hose style nozzle. It has a size range $2\frac{1}{8}$ " - $3\frac{1}{2}$ " (55mm - 90mm). The Universal Nozzle can be cut off in 10mm increments to suit your application.





Aluminum Locking Nozzle

UC-4.5LN: This nozzle is supplied with the UC-HL4.5 Launcher for $3\frac{1}{2}$ " - $4\frac{1}{2}$ " (90mm - 115mm) applications.

Sanitary Nozzles

Food-grade, stainless steel, tri-clamp sanitary nozzles for easy attachment to stainless steel tubing and hoses used in the food and beverage industry. Contact Ultra Clean to discuss specific needs and solutions.





Prototype 3D-Printed Nozzles

Ultra Clean engineers will help you design a custom nozzle to your specifications, then print a high quality resin prototype unit on our cutting-edge 3D printer. If interested, ask us for details!

Adapter & Locking Rings

- UC-AR1 fits the UC-HL2 Launcher and all nozzle types from \%" 1\frac{1}{4}".
- UC-AR2 fits the UC-HL3.5 Launcher and all nozzle types from ½" through 1¼".
- UC-AR3 fits the UC-HL3.5 Launcher and all nozzle types from 1½" through 2".
- UC-LR fits the UC-HL3.5 & UC-HL4.5 Launchers and the AR2, AR3 & UC-U55/90 nozzles.





Projectiles

Types & Applications


Projectiles clean when compressed against the internal surface of a hose, tube or pipe. Pressure is achieved as the projectile is approximately 20% to 30% larger than the internal diameter of the hose, tube or pipe. For instance, a 2" (50mm) projectile is recommended for a 1½" (38mm) hose. Individual circumstances may require a smaller or larger projectile. If too large it will not leave the nozzle, but if too small it will not clean effectively.

The enormous variety in types of couplings available today could render a recommended size inappropriate. When cleaning assemblies, a reduction in projectile size may be appropriate, as all recommendations are based on the most commonly used coupling sizes. Custom projectiles can also be developed.

All Ultra Clean Projectiles are made from virgin materials with a specific cell structure and density. This ensures a quality product capable of achieving most ISO-4406-99 and ISO-4405 cleanliness levels when our cleaning procedures are followed. Ultra Clean never uses rebonded, scrap or recycled materials in our projectiles like some other manufacturers.

Ultra Clean

Universal application for use with hose, tube, pipe and assemblies. Removes fine particles of loose contamination and can also be used for product purging.





Tube

For use with all types of tubing or pipes. Strongly recommended for stainless steel with mild to medium amounts of contamination, surface rust or scale build-




up. Removes mandrel lubricants, grease and oil after the bending process.

Size range: 6mm - 65mm.

Abrasive

For use with tubes or pipes to loosen mild to medium amounts of contamination, surface rust or scale build-up.
Always follow-up with an Ultra Clean projectile to clear away loosened contaminants and verify cleanliness. Can be used multiple times.



Ultra Scrub

For use on wet or dry applications of tubes or pipes to loosen medium to high amounts of contamination surface rust or scale build-up. Also navigates assemblies with sweeping bends or elbows. Always follow-up with



an Ultra Clean projectile to clear loosened contaminants and verify cleanliness. Can be used multiple times.

Size range: 6mm - 60 mm.

Ultra Clean 100mm-150mm

Ultra Clean Projectiles 100mm and larger are provided with a laminated backer to prevent air permeation. The laminated backer should be loaded into the nozzle last so that the air is pushing against it.



Bulk Projectiles

Ultra Clean Technologies also offers Ultra Clean & Tube style projectiles packaged in bulk quantities. The bulk projectile program complements the Bench Mount Launchers for use in a production type atmosphere.



Projectiles Chart

Projectile Kits

UC-P1-Projectile Kit



Includes:

- 11 bags of Ultra Clean Projectiles for cleaning out hose, tube and pipe applications up to ¼" to 1¼" ID.
- These projectiles also form a sub-kit that is included in the UC-EL8-DP Economy Launcher Kit.

Included in UC-P1-Projectile Kit.
 Included in UC-P2-Projectile Kit.

UC-P2-Projectile Kit



Includes:

- 13 bags of Ultra Clean Projectiles for cleaning out hose, tube and pipe applications up to ¼" to 2" ID.
- These projectiles also form a sub-kit that is included in the UC-CAP 2" Starter Kit.

Note: All projectile sizes are also available in bulk quantities. Ask your sales rep or call for details.

Projectiles chart								
Projectile Size	Bagged Qty	UC Style Medium Density	Tube Style High Density	*Abrasive	*Scrub			
2mm	100	UC02	N/A	N/A	N/A			
3mm	100	UC03	N/A	N/A	N/A			
4mm	100	UC04	N/A	N/A	N/A			
5mm	100	UC05	N/A	N/A	N/A			
6mm	100	UC06	UC06-TE	UC-A06	UC-SCR06			
7mm	100	UC07	UC07-TE	UC-A07	UC-SCR07			
8mm	100	UC08	UC08-TE	N/A	UC-SCR08			
10mm	100	UC10	UC10-TE	UC-A10	UC-SCR10			
12mm	100	UC12	UC12-TE	UC-A12	UC-SCR12			
14mm	100	UC14	UC14-TE	UC-A14	UC-SCR14			
16mm	100	UC16	UC16-TE	UC-A16	UC-SCR16			
18mm	100	UC18	UC18-TE	UC-A18	UC-SCR18			
20mm	50	UC20	UC20-TE	UC-A20	UC-SCR20			
22mm	50	UC22	UC22-TE	UC-A22	UC-SCR22			
24mm	50	UC24	UC24-TE	UC-A24	UC-SCR24			
26mm	50	UC26	UC26-TE	UC-A26	UC-SCR26			
28mm	40	UC28	UC28-TE	UC-A28	UC-SCR28			
30mm	40	UC30	UC30-TE	UC-A30	UC-SCR30			
33mm	40	UC33	UC33-TE	UC-A33	UC-SCR33			
36mm	30	UC36	UC36-TE	UC-A36	UC-SCR36			
40mm	30	UC40	UC40-TE	UC-A40	UC-SCR40			
45mm	20	UC45	UC45-TE	UC-A45	UC-SCR45			
50mm	20	UC50	UC50-TE	UC-A50	UC-SCR50			
55mm	15	UC55	UC55-TE	UC-A55	UC-SCR55			
60mm	15	UC60	UC60-TE	UC-A60	UC-SCR60			
65mm	10	UC65	UC65-TE	UC-A65	N/A			
70mm	10	UC70	N/A	UC-A70	N/A			
75mm	10	UC75	N/A	UC-A75	N/A			
80mm	10	UC80	N/A	UC-A80	N/A			
85mm	10	UC85	N/A	UC-A85	N/A			
90mm	10	UC90	N/A	UC-A90	N/A			
95mm	10	UC95	N/A	UC-A95	N/A			
100mm	10	UC100	N/A	UC-A100	N/A			
110mm	10	UC110	N/A	UC-A110	N/A			
120mm	10	UC120	N/A	S/O	N/A			
130mm	10	UC130	N/A	S/O	N/A			
140mm	10	UC140	N/A	S/O	N/A			
150mm	10	UC150	N/A	S/O	N/A			
			_	. 1 - 14 - 110 1				

N/A = Not available S/O = Special order *Not to be used with UC-BM1.25-G3 or UC-CAL-MS production launcher.

13

Accessories

UC-S Launcher Stand An essential piece of equipment!

- Acts as an anchor when operator needs both hands to lift hose to the nozzle.
- Prevents damage to launcher or nozzles, caused when dropped or by rough handling during routine work processes (Note: Rough handling or abuse voids all warranties).
- Provides safe, permanent storage.
- Launcher is always ready for hose, tube and pipe cleaning requirements.



The Launcher stand should be conveniently located for easy access when the operator needs two hands to lift the work and where he can easily pick it up and put it back down again. Many operators use the launcher stand as a permanent storage device for the launcher, rather than continually removing the launcher from the carrying case.

UC-PC Projectile Catcher Bucket

- Prevent injury to yourself, a customer or an innocent bystander should contamination (such as steel slivers, or fragments of wire) be forcefully propelled, along with the projectile from inside the hose, tube or pipe.
- Allows you to catch and visually ascertain the contamination itself, expelled by the projectile from the hose, tube or pipe.
- Ascertain internal condition of the hose, tube or pipe by inspecting spent projectiles.
- Maintain a clean and professional work space.
- Saves time, energy and cleaning costs by eliminating mess. An integral part of the
- Locate in clean, practical position.

Ultra Clean System!

Quick Connects Full-flow connections which are perfect for air supply manifolds!



- Size: 1/4" MNPT x Quick Connect, Part Number: UC-QRCP
- Size: 3/8" MNPT x Quick Connect, Part Number: UC-QRC-30PM
- Size: ½" MNPT x Quick Connect, Part Number: UC-QRC-40PM



- Allows for 360° swivelling!
- Fits at 45° angle to reduce operator fatigue
- Size: ¹/₄" MNPT by Male Quick Connect
- Part Number: UC-QRC-RP



- Excellent general purpose coupling for connecting factory air supply to pneumatic tools
- Size: ½" hose barb by Female quick-disconnect
- Part Number: UC-QRC-C

UC-NH25 Nozzle Holder

A great alternative to leaving your nozzles in the carry case. It can be attached to a workbench and offers these additional advantages:

- Easy access during operation.
- Keeps nozzles and system visible, reminding workers of cleaning procedures.
- Becomes a promotional feature for customers.
- Accommodates ¼" through 2" nozzles.





Production Equipment

Our production equipment is built specifically to keep pace with busy, high-volume production environments, while providing the same exceptional results you've come to expect from Ultra Clean in hose, tube and pipe cleaning and contamination removal.

Bench Mount Launcher, Projectile Verification System (PVS) & AutoLoader

- Manual and automated equipment for hose or tube assembly production lines.
- Increased production speed.
- Reduced cost.
- Reduction of unnecessary air consumption.
- Easily incorporates into existing production environment
- Easy to operate.
- Electronically controlled.

Air Requirements for Production Equipment

- 80 PSI (5.5 Bar) minimum to 110 PSI (7.5 Bar) maximum.
- ½" ID air hose to ensure 38 SCFM (1.1 m³/min) at 80 PSI (5.5 Bar) air flow.
- Large industrial compressor strongly recommended.
- UC-D1 Super-Dry Compressed Air Dryer strongly recommended, see Page 19.

UC-BM1.25-G3 11/4" Bench Mount Launcher

- Capable of cleaning ³/₁₆" 1¹/₄" hose, tube or pipe.
- Easy manual projectile loading.
- Supplied with a 5 micron air filter, pneumatic foot switch with twin line air hose and your choice of 8 hose or tube nozzles ³/₁₆" 1½" (5mm 32mm ID).
- Effortless to operate with a cycle time of 1.2 seconds.
- Ideal for production type environments due to speed, simplicity and longevity.
- Stainless steel housing with anodized aluminum internal components.
- Works as stand-alone unit or in conjunction with the UC-PVS-G4 Projectile Verification System.
- Debris door to keep launcher chamber clean when not in use.



UC-BM-HH Hand Held Launcher Extension

- Pneumatic hand held launcher specially designed for use with the UC-BM1.25-G3 Bench Mount.
- Standard 6' extension hose provides added mobility, allowing user to easily take a hand held launcher directly to a hose or tube assembly.
- Easily attaches to front of launcher, no tools required.
- Air requirements same as for the Bench Mount unit.



Part Number#	Compatible UC Projectile Sizes
UC-BM-HH-3/4"	UC07, UC08, UC10, UC12, UC14, UC16, UC18, UC20, UC22, UC24, UC26

UC-PVS-G4 Projectile Verification System

Guarantees a projectile is never left inside a hose or tube that has been cleaned!



Air supply for Hand Held Launcher located on right side of control station



The UC-CB
Containment Barrel
must be used with,
and is included with,
the UC-PVS-G4
Projectile Verification
System.

- UC-PVS-G4 Control Station
- PLC/HMI Touchscreen for intuitive navigation and set-up in multiple languages.
- (3) Three Cleaning Modes with time-adjustable air blow.
- Power cable converts 240V AC (Europe) or 110V AC to 24V DC.
- Capable of capturing/transferring data such as projectile counts and faults, via a USB port to ensure no projectile is left inside a cleaned hose or tube
- Remote monitoring.
- Green Light on Containment Barrel goes on and air blow automatically stops when cleaning process is complete and projectile verified.
- Electronic foot switch activates the firing sequence of the UC-BM1.25-G3 (3/16" 11/4") Bench Mount Launcher.

- The UC-HL-PVS (3/16" 2") Electronic Hand Held Launcher can be fired by a built-in electronic trigger.
 - Air supply for Hand Held Launcher is conveniently located on the right side of the control station.

5 Micron Filter, Regulator, Gauge (on top of control station)

- Requires Ultra Clean UC-QRC-C quick disconnect coupling and ½" I.D. (13mm) air hose to ensure correct SCFM air requirements for the Control Station.
- Incoming air is filtered to 5 micron.
- Regulator and gauge adjustment helps ensure proper operating pressure.

Containment Barrel Connector & Foot Switch (on back of control station)

- 8-pin military-style plug secures the Containment Barrel cord to the Control Station.
- Electric Foot Switch provides hands-free operation to trigger the firing process. Pressure of 80 to 110 PSI maximum (5.5 to 7.5 Bar).

Required for Operation



AND/OR

UC-HL-PVS 1/4" - 2" Hand Held Launcher



- Electronic hand held launcher (1/4" 2") specifically designed for use with PVS control station. Fired by a built-in
- Fired by a built-in electronic trigger.

UC-CAL-MS Carousel AutoLoader






Easily accomodates optional UC-CAL-Mark marking system!

See next page.

- Automatic projectile loading, firing, and verification.
- Removes internal contamination from hoses, tubes or pipes quickly and efficiently in a production environment.
- Ideal for high volume production cells making hose or tube assemblies.
- Fully integrates into automated tube manufacturing processes.
- Verifies projectile has exited hose, tube or pipe and entered Containment Barrel along with expelled contamination.
- Cleans hoses, tubes and pipes with an internal diameter of 1/4" 1" (6mm 25mm).
- Nine (9) Hopper Box options, each handling one projectile size from 7mm to 33mm.
- Foot pedal or hand held firing device options.
- Automatically connects 110V AC-60Hz or 240V AC-50Hz to 24V DC with included electrical cord for easy install.
- PLC/HMI Touchscreen guides operator through set-up and cleaning process.
- Projectile Counter for counting fired and verified projectiles.
- Containment Barrel has a stainless steel chute assembly with green, yellow and red lights to indicate system and projectile mode (ready, firing, verified).
- 5 Micron Filter Regulator and Gauge for setting operating pressure at between 80 to 110 PSI (5.5 to 7.5 Bar).
- Requires clean, dry air for which the UC-D1 Super-Dry Compressed Air Dryer is strongly recommended.


Hopper Boxes

- Quick change.
- Clean projectile loading and storage.
- Hopper boxes ordered separately based on projectile size (7mm-33mm).
- Stainless steel construction.
- Static control with built-in air ionization.
- Includes safety sensor to stop system and carousel functions until lid is closed.
- Laser-marked for easy identification.

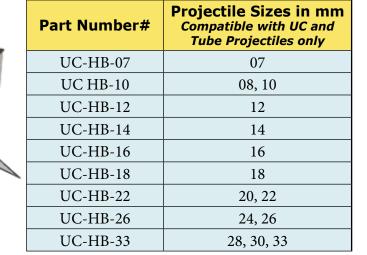

UC-CAL-MARK Marking System for UC-CAL-MS Carousel AutoLoader

- Marking system attaches to front of UC-CAL-MS.
- Adjustable X and Y axis to precisely place an indicator mark on O.D. of application.
- Mark ensures proper stem depth insertion.
- May also be used for color-coding purposes such as indication of production years.
- Marking indicates that hose is cleaned and projectile is verified.

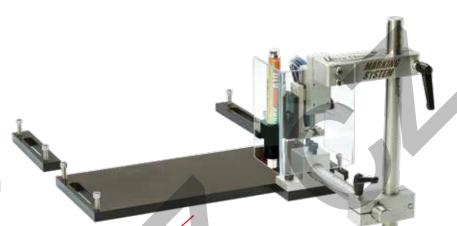



Order the optional UC-CAL-Mark with your UC-CAL-MS to get the most out of your Carousel AutoLoader!





UC-CAL-HH Hand Held Launcher

- Optional hand held launcher for use when the marking system is disconnected.
- Electronic hand held launcher specifically designed for use with UC-CAL-MS.
- Standard 6' extension hose/cable provided added mobility, allowing user to easily take a hand held launcher directly to a hose or tube assembly.
- Three sizes available to handle various hose I.D. sizes: ½", 5%", 34".

Part Number#	Projectile Sizes in mm Compatible with UC and Tube Projectiles only
UC-CAL-HH-1/2"	07, 08, 10, 12, 14
UC-CAL-HH-5/8"	07, 08, 10, 12, 14, 16, 18, 20, 22
UC-CAL-HH-3/4"	07, 08, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30

Marking Systems Accessories

UC-MARK-ACC

Included with every UC-CAL-MARK system.

The Marking System includes:

- Tips.
- Holder.
- Allen Wrench.
- Full Set Color Markers (1 box per color).

UC-MARK

Markers for UC-CAL-MS Marking System.

- High quality paint-like markers.
- Available in four bright colors that can be easily seen on hoses.
- Wear, fade and bleed-resistant.
- Tight, secure, color-coded caps.
- Custom holder included with each marker to position upright when not in use.



UC-MARK-BLUE-BOX (qty: 12) UC-MARK-RED-BOX (qty: 12) UC-MARK-WHITE-BOX (qty: 12) UC-MARK-YELLOW-BOX (qty: 12)

Production Equipment Accessory



UC-CB CONTAINMENT BARREL

- Catches and verifies that projectile and contamination have been expelled.
- Includes a wheeled dolly for ease of use.
- Large filter allows compressed air to escape while retaining contamination residue.
- Built-in sight gauge indicates when system needs emptying.
- Indicator lights signify at which stage system is operating.

Green = ready to launch projectile and/or has verified a caught projectile.

Y*ellow* blinking = projectile has been fired and is in process in hose or tube.

Red = projectile not verified and may still be in the hose or launcher.

Comes standard with.....

UC-PVS-G4 Projectile Verification System UC-CAL-MS Carousel AutoLoader

Production Equipment Compatibility Our production equipment keeps pace with busy, high-volume production environments!

Product Compatibility UC-BM1.25-G3 and UC-PVS-G4	Cleaning 1/4" to 3/4"	Cleaning ¼" to 1-1/4"	Cleaning 1/4" to 2"	Projectile Verification	Data Logging/ Projectile Counting	Multiple Cleaning Modes	Automatic Loading	Assembly Marking
UC-BM1.25-G3	1	\	X	x	x	X	X	x
UC-BM1.25-G3 with UC-BM-HH-3/4"	1	x	X	X	x	X	X	X
UC-PVS-G4 with UC-BM-1.25-G3	1	1	X	1	1	>	X	X
UC-PVS-G4 with UC-HL-PVS	✓	✓	*	X	\	*	X	X

Product Compatibility UC-CAL-MS	Cleaning 1/4" to 1/2"	Cleaning 1/4" to 5/8"	Cleaning 1/4" to 3/4"	Cleaning 1/4" to 1"	Projectile Verification	Data Logging/ Projectile Counting	Multiple Cleaning Modes	Automatic Loading	Assembly Marking
UC-CAL-MS	*	1	*	1	1	*	*	*	✓
UC-CAL-MS with UC-CAL-HH-1/2"	>	X	X	X	1	1	1	\	X
UC-CAL-MS with UC-CAL-HH-5/8"	1	1	X	X	1	1	1	1	X
UC-CAL-MS with UC-CAL-HH-3/4"	1	1	1	x	1	1	1	1	X

 \checkmark = Capable X = NOT Capable

Recommended Sizing Chart

	Hose**									
Hose ID			UC							
Nom. In.	DN MM	Nozzle	Projectile							
3/16"	5	UC-AH05- BLUE	UC06							
1/4"	6	UC-H06	UC10 or UC12							
5/16"	8	UC-H08	UC12 or UC14							
3/8"	10	UC-H10	UC14 or UC16							
1/2"	13	UC-H13	UC18 or UC20							
5/8"	16	UC-H16	UC22							
3/4"	19	UC-H19	UC26							
1"	25	UC-H25	UC33 or UC36							
11/4"	32	UC-H32	UC40 or UC45							
1½"	38	UC-H38	UC50 or UC55							
2"	50	UC-H50	UC60 or UC65							
2½"	63	UC-U55/90	UC75							
3"	76	UC-U55/90	UC85							
3½"	89	UC-U55/90	UC100							
4"	102	UC-4.5LN	UC120							
4½"	114	UC-4.5LN	UC130							

^{**}Use larger recommended Ultra Clean Projectiles when cutting hose with an abrasive wheel. The above sizes are recommendations. Due to different manufacturers, types of fittings, and the amount of contamination in the line, the size projectile may need to be adjusted.

ASSY w/FJIC										
FJIC Size	Nozzle	UC								
Dash		Projectile								
-4	UC-J06	UC06 or UC07								
-6	UC-J10	UC12								
-8	UC-J13/T13	UC16								
-10	UC-J16/T16	UC22								
-12	UC-J19/T19	UC26								
-16	UC-J25/T22	UC33								
-20	UC-J32/T25	UC40								
-24	UC-J38/T38	UC50								
-32	UC-J50/T50	UC60								

	ASSY w/FFORX								
FFORX Size Dash	Nozzle	UC Projectile							
-4	UC-4FFORX	UC06 or UC07							
-6	UC-H06	UC12							
-8	UC-H10	UC16							
-10	UC-H13	UC22							
-12	UC-H16	UC26							
-16	UC-H19	UC33							
-20	UC-H25	UC40							

ASSY w/CODE 61 & 62 Flanges									
Flange Size	Nozzle	UC Projectile							
Dash									
-8	UC-H10	UC16							
-10	UC-H13	UC22							
-12	UC-H16	UC26							
-16	UC-H19	UC33							
-20	UC-H25	UC40							
-24	UC-H32	UC50							
-32	UC-H38	UC60							

*Tube Sizing Chart - Nominal Inch

00 V W-II	Marria		tile Type		
OD X Wall	Nozzle	UC	Tube	Abrasive	Scrub
1/8" X .030"	UC-T03	UC04			
¼" X .028"	UC-T06	UC08	UC07-TE	UC-A07	UC-SCR07
½" X .035"	UC-T06	UC08	UC07-TE	UC-A07	UC-SCR07
¼" X .049"	UC-T06	UC08	UC06-TE	UC-A07	UC-SCR06
¼" X .065"	UC-T06	UC07	UC06-TE		UC-SCR06
5/16" X .028"	UC-T08	UC12	UC10-TE	UC-A10	UC-SCR10
5/16" X .035"	UC-T08	UC12	UC07-TE	UC-A10	UC-SCR07
3/8" X .028"	UC-T10	UC14	UC10-TE	UC-A12	UC-SCR10
3%" X .035"049"	UC-T10	UC14	UC10-TE	UC-A12	UC-SCR10
3%" X .065"	UC-T10	UC12	UC10-TE	UC-A10	UC-SCR10
½" X .035"	UC-J13/T13	UC16	UC14-TE	UC-A16	UC-SCR14
½" X .049"	UC-J13/T13	UC16	UC12-TE	UC-A16	UC-SCR12
½" X .065"	UC-J13/T13	UC16	UC12-TE	UC-A14	UC-SCR12
½" X .083"	UC-J13/T13	UC14	UC12-TE	UC-A12	UC-SCR12
5/8" X .049"	UC-J16/T16	UC22	UC16-TE	UC-A20	UC-SCR16
5/8" X .065"	UC-J16/T16	UC20	UC16-TE	UC-A18	UC-SCR16
5/8" X .083"	UC-J16/T16	UC20	UC14-TE	UC-A18	UC-SCR14
³ / ₄ " X .049065"	UC-J19/T19	UC26	UC20-TE	UC-A24	UC-SCR20
34" X .095"	UC-J19/T19	UC22	UC18-TE	UC-A20	UC-SCR18
7/8" X .049"	UC-J25/T22	UC33	UC26-TE	UC-A30	UC-SCR26
7/8" X .065"	UC-J25/T22	UC30	UC22-TE	UC-A28	UC-SCR22
7/8" X .095"	UC-H16	UC28	UC22-TE	UC-A26	UC-SCR22
1" X .065"	UC-J32/T25	UC33	UC28-TE	UC-A30	UC-SCR28
1" X .083"095"	UC-J32/T25	UC33	UC26-TE	UC-A30	UC-SCR26
1" X .120"	UC-J32/T25	UC30	UC26-TE	UC-A28	UC-SCR26
1¼" X .065"	UC-T32	UC40	UC33-TE	UC-A40	UC-SCR33
1¼" X .083"	UC-T32	UC40	UC33-TE	UC-A36	UC-SCR33
1¼" X .095"	UC-T32	UC40	UC33-TE	UC-A36	UC-SCR33
1¼" X .109"	UC-T32	UC36	UC33-TE	UC-A36	UC-SCR33
1¼" X .120"	UC-T32	UC36	UC33-TE	UC-A33	UC-SCR33
1½" X .065"120"	UC-J38/T38	UC50	UC40-TE	UC-A45	UC-SCR40
1½ X .134"148"	UC-J38/T38	UC45	UC40-TE	UC-A40	UC-SCR40
2" X .065"120"	UC-J50/T50	UC60	UC50-TE	UC-A55	UC-SCR50
2" X .134"188"	UC-J50/T50	UC55	UC50-TE	UC-A50	UC-SCR50

*Tube Sizing Chart - Metric

05 V W II	Nozzle	Projectile Type						
OD X Wall		UC	Tube	Abrasive	Scrub			
3 X .5	UC-T03	UC04						
3 X .7	UC-T03	UC03						
6 X 1.0	UC-6X1.5	UC07	UC06-TE	UC-A06	UC-SCR06			
6 X 1.5	UC-6X1.5	UC07		UC-A06				
8 X 1.0	UC-8X1.5	UC10	UC07-TE	UC-A07	UC-SCR07			
8 X 1.5	UC-8X1.5	UC10	UC07-TE	UC-A07	UC-SCR07			
10 X 1.0	UC-10X1.5	UC14	UC12-TE	UC-A12	UC-SCR12			
10 X 1.5	UC-10X1.5	UC14	UC12-TE	UC-A12	UC-SCR12			
12 X 1.0	UC-12X2.0	UC16	UC14-TE	UC-A14	UC-SCR14			
12 X 1.5	UC-12X2.0	UC16	UC14-TE	UC-A14	UC-SCR14			
12 X 2.0	UC-12X2.0	UC14	UC12-TE	UC-A12	UC-SCR12			
14 X 1.0	UC-14X2.0	UC18	UC16-TE	UC-A16	UC-SCR16			
14 X 1.5	UC-14X2.0	UC16	UC14-TE	UC-A14	UC-SCR14			
14 X 2.0	UC-14X2.0	UC16	UC14-TE	UC-A14	UC-SCR14			
15 X 1.0	UC-15X2.0	UC20	UC16-TE	UC-A18	UC-SCR16			
15 X 1.5	UC-15X2.0	UC18	UC16-TE	UC-A16	UC-SCR16			
15 X 2.0	UC-15X2.0	UC16	UC14-TE	UC-A14	UC-SCR14			
16 X 1.0	UC-16X2.5	UC22	UC18-TE	UC-A20	UC-SCR18			
16 X 1.5	UC-16X2.5	UC20	UC16-TE	UC-A18	UC-SCR16			
16 X 2.0	UC-16X2.5	UC18	UC16-TE	UC-A16	UC-SCR16			
16 X 2.5	UC-16X2.5	UC16	UC14-TE	UC-A14	UC-SCR14			
18 X 1.0	UC-18X2.5	UC24	UC20-TE	UC-A22	UC-SCR20			
18 X 1.5	UC-18X2.5	UC24	UC18-TE	UC-A20	UC-SCR18			
18 X 2.0	UC-18X2.5	UC22	UC18-TE	UC-A20	UC-SCR18			
18 X 2.5	UC-18X2.5	UC20	UC16-TE	UC-A18	UC-SCR16			
20 X 1.5	UC-20X3.0	UC26	UC22-TE	UC-A24	UC-SCR22			
20 X 2.0	UC-20X3.0	UC24	UC20-TE	UC-A22	UC-SCR20			

*Tube Sizing Chart - Metric

05 V W411	NOTTLE	PROJECTILE TYPE					
OD X WALL	NOZZLE	UC	TUBE	ABRASIVE	SCRUB		
20 X 2.5	UC-20X3.0	UC24	UC18-TE	UC-A20	UC-SCR18		
20 X 3.0	UC-20X3.0	UC22	UC18-TE	UC-A20	UC-SCR18		
22 X 1.0	UC-22X2.0	UC30	UC26-TE	UC-A28	UC-SCR26		
22 X 1.5	UC-22X2.0	UC30	UC26-TE	UC-A28	UC-SCR26		
22 X 2.0	UC-22X2.0	UC30	UC26-TE	UC-A28	UC-SCR26		
25 X 2.0	UC-25X3.0	UC33	UC28-TE	UC-A30	UC-SCR28		
25 X 2.5	UC-25X3.0	UC30	UC26-TE	UC-A28	UC-SCR26		
25 X 3.0	UC-25X3.0	UC30	UC26-TE	UC-A28	UC-SCR26		
28 X 2.0	UC-28X2.5	UC36	UC33-TE	UC-A33	UC-SCR33		
28 X 2.5	UC-28X2.5	UC36	UC30-TE	UC-A33	UC-SCR30		
30 X 2.0	UC-30X4.0	UC36	UC33-TE	UC-A33	UC-SCR33		
30 X 2.5	UC-30X4.0	UC36	UC30-TE	UC-A33	UC-SCR30		
30 X 3.0	UC-30X4.0	UC36	UC30-TE	UC-A33	UC-SCR30		
30 X 4.0	UC-30X4.0	UC36	UC30-TE	UC-A33	UC-SCR30		
35 X 2.0	UC-35X3.0	UC45	UC40-TE	UC-A40	UC-SCR40		
35 X 3.0	UC-35X3.0	UC40	UC36-TE	UC-A36	UC-SCR36		
35 X 4.0	UC-H25	UC40	UC33-TE	UC-A36	UC-SCR33		
35 X 5.0	UC-H25	UC36	UC30-TE	UC-A33	UC-SCR30		
38 X 2.5	UC-38X5.0	UC50	UC40-TE	UC-A45	UC-SCR40		
38 X 3.0	UC-38X5.0	UC50	UC40-TE	UC-A45	UC-SCR40		
38 X 4.0	UC-38X5.0	UC45	UC40-TE	UC-A40	UC-SCR40		
38 X 5.0	UC-38X5.0	UC40	UC36-TE	UC-A36	UC-SCR36		
42 X 2.0	UC-42X3.0	UC55	UC50-TE	UC-A50	UC-SCR50		
42 X 3.0	UC-42X3.0	UC50	UC45-TE	UC-A50	UC-SCR45		
50 X 3.0	UC-50X6.0	UC60	UC55-TE	UC-A55	UC-SCR55		
50 X 5.0	UC-50X6.0	UC55	UC50-TE	UC-A55	UC-SCR50		
50 X 6.0	UC-50X6.0	UC55	UC50-TE	UC-A50	UC-SCR50		

^{*}Requirements for Tubing Applications:

Tubing must be deburred prior to firing projectiles. Depending on the type of contamination present in the tube, abrasive projectiles may be used to remove rust and scale. Always use an UC or TUBE projectile after the use of an abrasive projectile. The TUBE style is strongly recommended for stainless steel for mild to medium amounts of contamination, surface rust, or scale build-up. If the operator is unsure which type or size projectile to use, please call us for technical assistance.

Pipe Sizing Chart

SCH 40	Norric	Projectile Type					
ЭCП 40	Nozzle	UC	Tube	Abrasive	Scrub		
1/4"	UC-H08	UC14	UC12-TE	UC-A12	UC-SCR12		
3/8"	UC-H13	UC18	UC16-TE	UC-A16	UC-SCR16		
1/2"	UC-H16	UC20	UC18-TE	UC-A18	UC-SCR18		
3/4"	UC-H19	UC30	UC26-TE	UC-A26	UC-SCR26		
1"	UC-H25	UC36	UC33-TE	UC-A33	UC-SCR33		
11/4"	UC-H32	UC45	UC40-TE	UC-A40	UC-SCR40		
1½"	UC-H38	UC55	UC50-TE	UC-A50	UC-SCR50		
2"	UC-H50	UC65	UC55-TE or UC60-TE	UC-A55 or UC-A60	UC-SCR55 or UC-SCR60		
2½"	UC-U55/90	UC75	N/A	UC-A70	N/A		
3"	UC-U55/90	UC85	N/A	UC-A80	N/A		
3½"	UC-U55/90	UC100	N/A	UC-A95	N/A		
4"	UC-4.5LN	UC120	N/A	UC-A110	N/A		
				tile Type			
SCH 80	Nozzle	UC	Tube	Abrasive	Scrub		
3/8"	UC-H10	UC16	UC14-TE	UC-A14	UC-SCR14		
	UC-H13	UC20	UC16-TE	UC-A16	UC-SCR16		
1/2"			or UC18-TE	or UC-A18	or UC-SCR18		
3/4"	UC-H19	UC26	UC22-TE	UC-A22	UC-SCR22		
1"	UC-H25	UC36	UC30-TE	UC-A30	UC-SCR30		
11/4"	UC-H32	UC45	UC40-TE	UC-A40	UC-SCR40		
1½"	UC-H38	UC50	UC45-TE	UC-A45	UC-SCR45		
2"	UC-H38	UC60	UC55-TE	UC-A55	UC-SCR55		
2½"	UC-H50	UC70	N/A	UC-A65	N/A		
3"	UC-U55/90	UC85	N/A	UC-A80	N/A		
3½"	UC-U55/90	UC110	N/A	UC-A110	N/A		
4"	UC-4.5LN	UC115	N/A UC-A110		N/A		
CCU 160	Normia		Projec	ctile Type			
SCH 160	Nozzle	UC	Tube	Abrasive	Scrub		
3/4"	UC-H16	UC20	UC18-TE	UC-A18	UC-SCR18		
1"	UC-H19	UC30	UC26-TE	UC-A26	UC-SCR26		
11/4"	UC-H25	UC36	UC33-TE	UC-A33	UC-SCR33		
1½"	UC-H32	UC45	UC40-TE	UC-A40	UC-SCR40		
	UC-H38	LICEE	UC45-TE	UC-A45	UC-SCR45		
2"		UC55	or UC50-TE	or UC-A50	or UC-SCR50		
07/11	UC-H50	UC65	UC55-TE		UC-SCR55		
2½"			or UC60-TE	UC-A60	or UC-SCR60		
3"	UC-U55/90	UC75	N/A UC-A70		N/A		
4"	UC-U55/90			N/A			

Abrasive projectiles may be used when there is build-up of contamination, surface rust or scale. For pipe applications with greater build-up, use an Ultra Scrub projectile (pipe must be straight). An UC projectile must be used after abrasive and scrub projectiles. Call if you need help in sizing your application for the correct nozzles and projectiles.

Hose Cleanliness Evaluation Report



Company: Ultra Clean Technologies Corp.

Address: 746 Shiloh Pike

City: Bridegeton State: NJ Zip: 08302

Telephone: 1-800-791-9111

Contact: Bruce Riley

Title: President

E-mail: briley@ultracleantech.com

Test Date: September 5, 2006

New Oil for Evaluation: AW46 Hydraulic Oil

Hose Type: -16 1" x 28" oal, 4 spiral

hyd hose assembly

Note: w 1" Male NPT EE

Dear Bruce

Test Procedure

1. The hose was rinsed with new hydraulic oil several times with non-contact flow technique.

2. The hose is washed with the same oil quantity of new oil each time

3. New hydraulic oil is AW46 viscosity grade and filtered to a low ISO code cleanliness before testing.

Fax: 856-453-4975

 Laser light particle count is used as particle count analysis. Particle counter is made by HIAC/ROYCO and uses the ISO:4406-99 standard for particle count method. Special quality control for particle count testing is made to make sure that the particle count shows accurate reading.

5. All oil samples were tested twice to make sure that particle count reading confirms accuracy.

We hope that this test data will provide sufficient information regarding hose cleanliness evaluation.

Yours sincerely,

Vichai Srimongkolkul Technical Director

Item Hose I.D.		Hose Descriptions	Solid Contamination Particle Count in 1 cc					ISO	
			4μ	6μ	14µ	20μ	30μ	40µ	Code
	NEW	New AW 46 Hydraulic Oil as base line comparsion	214	64	23	9	1	0	15 / 13 / 12
1	A1	Chop saw with abrasive wheel - no cleaning	99,999	99,999	92,618	67,576	29K	15K	24 / 24 / 24
2	A2	Chop saw with abrasive wheel - 10 second air blow	96,508	52,827	4,546	1,013	53	13	24 / 23 / 19
3	A3	Chop saw with abrasive wheel - Ultra Clean	1,824	511	54	20	2	0	18 / 16 / 13
	l /								
4	A4	Chop saw with metal scalloped blade - no cleaning	99,999	99,999	54,879	29,617	6.4K	2.5K	24 / 24 / 23
5	A5	Chop saw with metal scalloped blade - 10 second air blow	99,999	84,470	18,639	5,725	752	247	24 / 24 / 21
6	A6	Chop saw with metal scalloped blade - Ultra Clean	2,354	638	73	22	5	1	18 / 16 / 13

OilPure Technologies, Inc. P.O. Box 483976 • Kansas City • Missouri • 64148• USA • Tel: 913-906-0400 • Fax: 913-906-9815 • www.oilpure.com

