




The 10, 11 and 12 Rectus Moldtite coupling series were especially developed for connecting coolant lines and injection moulds. These stand out for their convenient, single-handed operation and a reliable O-ring seal. Widely used in Europe.

- Available in:
 - single shut-off, double shut-off or straight-through versions
- The straight-through couplings are equipped with nickel plated sleeves for quick and accurate visual differentiation
- The angular connections prevent kinks from forming in the hose
- Available on request:
 - series 10/11 are also available with special FFKM high-temperature seal for applications up to constant temperature 200°C

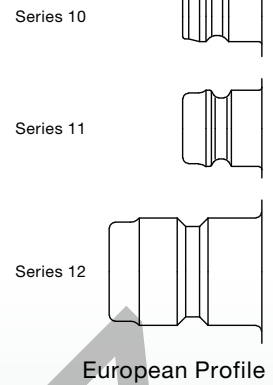

KF Straight-Through

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 16 l/min.
- Series 11: 50 l/min.
- Series 12: 106 l/min.

pressure drop 0.5 bar

KA Single Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 8 l/min.
- Series 11: 20 l/min.
- Series 12: 38 l/min.

pressure drop 0.5 bar

KB Double Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 7 l/min.
- Series 11: 15 l/min.
- Series 12: 28 l/min.


pressure drop 0.5 bar

* maximum static working pressure with design factor 4 to 1.

→|← Straight-Through

10/11/12KFA Coupler without valve, Male Thread

Brass, FKM

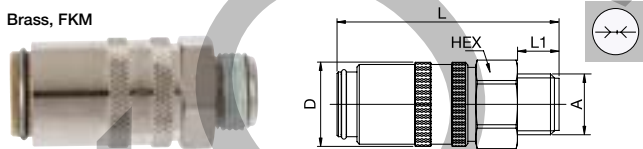


DN	Series	A	HEX	L	L1	D
6	10	M14 x 1.5	10KFAM14MVX	17	48	9 18
		G1/4	10KFAW13MVX	17	48	9 18
		G3/8	10KFAW17MVX	19	48	9 18
9	11	G1/4	11KFAW13MVX	22	51.5	9 23
		M16 x 1.5	11KFAM16MVX	22	51.5	9 23
		G3/8	11KFAW17MVX	22	51.5	9 23
13	12	G1/2	11KFAW21MVX	22	51.5	12 23
		G1/2	12KFAW21MVX	30	74	12 32
		G3/4	12KFAW26MVX	30	78	16 32

→|← Straight-Through

10/11KFAR Coupler without valve, Male Thread 90°


Brass, FKM

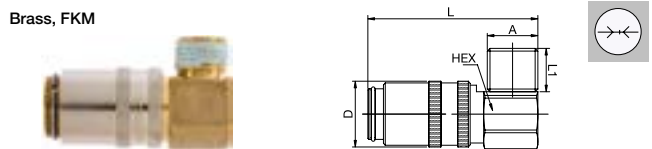


DN	Series	A	HEX	L	L1	D
6	10	G1/4	10KFAR13MVX	17	47	12 18
		M14 x 1.5	10KFAR14MVX	17	47	12 18
9	11	M16 x 1.5	11KFAR16MVX	22	53.5	12 23

10/11KFAH Coupler without valve, Male Thread 45°

Brass, FKM

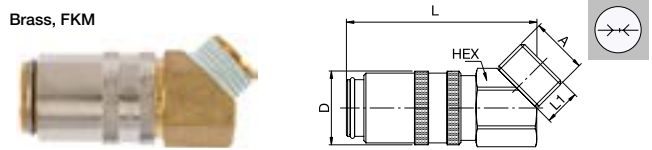



DN	Series	A	HEX	L	L1	D
6	10	G1/4	10KFAH13MVX	17	47	9 18
		M14 x 1.5	10KFAH14MVX	17	47	9 18
9	11	M16 x 1.5	11KFAH16MVX	22	53.5	9 23




Straight-Through

10/11KFIW Coupler without valve, Female Thread

Brass, FKM




DN	Series	A	HEX	L	L1	D
6	10	G1/4	17	41	10	18
		G3/8	19	45	10	18
9	11	G1/4	21	46.5	10	23
		G3/8	21	46.5	10	23



Straight-Through

10/11KFTP Coupler without valve, Push-Lok


Brass, FKM



DN	Series	A	L	L1	D
6	10	6	50.5	20.4	18
		10	54	24.2	18
9	11	10	61	24.2	23
		13	64.5	27.9	23

10/11/12KFTF Coupler without valve, Hose Barb


Brass, FKM

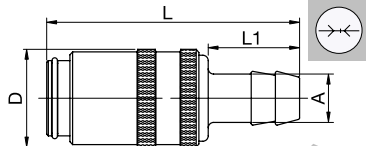

DN	Series	A	L	L1	D
6	10	9	52	22	18
9	11	13	61.5	25	23
13	12	19	90	32	32

10/11KFPR Coupler without valve, Push-Lok 90°


Brass, FKM



DN	Series	A	L	L1	D
6	10	6	46	20.4	18
		10	46	24.2	18
9	11	10	56.5	24.2	23
		13	56.5	27.9	23

10/11/12KFTR Coupler without valve, Hose Barb 90°


Brass, FKM



DN	Series	A	L	L1	D
6	10	9	41	22	18
9	11	13	51	28.5	23
13	12	19	78	32	32

10/11KFPH Coupler without valve, Push-Lok 45°


Brass, FKM





DN	Series	A	L	L1	D
6	10	6	41	20.4	18
		10	41	24.2	18
9	11	10	51	24.2	23
		13	51	27.9	23

10/11/12KFTH Coupler without valve, Hose Barb 45°

Brass, FKM





DN	Series	A	L	L1	D
6	10	9	52	22	18
9	11	13	51	25	23
13	12	19	78	30	32



Single Shut-off / Double Shut-off

10/11/12KBA Coupler with valve, Male Thread


Brass, FKM



DN	Series	A	HEX	L	L1	D
6	10	M14 x 1.5 10KBAM14MVX	17	48	9	18
		G1/4 10KBAW13MVX	17	48	9	18
		G3/8 10KBAW17MVX	19	48	9	18
9	11	G1/4 11KBAW13MVX	22	51.5	9	23
		M16 x 1.5 11KBAM16MVX	22	51.5	9	23
		G3/8 11KBAW17MVX	22	51.5	9	23
13	12	G1/2 11KBAW21MVX	22	51.5	12	23
		G1/2 12KBAW21MVX	30	74	12	32
		G3/4 12KBAW26MVX	30	78	16	32

10/11KBAR Coupler with valve, Male Thread 90°



Brass, FKM





DN	Series	A	HEX	L	L1	D
6	10	G1/4 10KBAR13MVX	17	47	12	18
		M14 x 1.5 10KBAR14MVX	17	47	12	18
9	11	M16 x 1.5 11KBAR16MVX	22	53.5	12	23

10/11KBAH Coupler with valve, Male Thread 45°

Brass, FKM





DN	Series	A	HEX	L	L1	D
6	10	G1/4 10KBAH13MVX	17	47	9	18
		M14 x 1.5 10KBAH14MVX	17	47	9	18
9	11	M16 x 1.5 11KBAH16MVX	22	53.5	9	23



Single Shut-off / Double Shut-off

10/11KBIW Coupler with valve, Female Thread



Brass, FKM



DN	Series	A	HEX	L	L1	D
6	10	G1/4 10KBIW13MVX	17	41	12	18
		G3/8 10KBIW17MVX	19	45	12	18
9	11	G1/4 11KBIW13MVX	21	46.5	10	23
		G3/8 11KBIW17MVX	21	46.5	10	23

10/11/12KBTF Coupler with valve, Hose Barb




Brass, FKM



DN	Series	A	L	L1	D
6	10	9	52	22	18
9	11	13	61.5	25	23
13	12	19	90	32	32

10/11/12KBTR Coupler with valve, Hose Barb 90°


Brass, FKM



DN	Series	A	L	L1	D
6	10	9	41	22	18
9	11	13	51	28.5	23
13	12	19	78	32	32

10/11/12KBTH Coupler with valve, Hose Barb 45°

Brass, FKM




DN	Series	A	L	L1	D
6	10	9	52	22	18
9	11	13	51	25	23
13	12	19	78	30	32



Single Shut-off / Double Shut-off

10/11KBTP Coupler with valve, Push-Lok


Brass, FKM

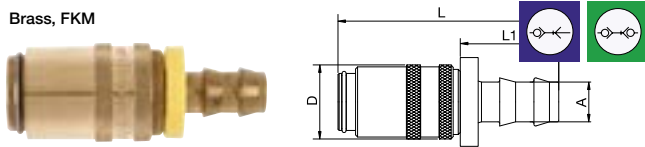

DN	Series	A		L	L1	D
6	10	6	10KBTP06MVX	50.5	20.4	18
		10	10KBTP10MVX	54	24.2	18
9	11	10	11KBTP10MVX	61	24.2	23
		13	11KBTP13MVX	64.5	27.9	23

10/11KBPR Coupler with valve, Push-Lok 90°


Brass, FKM

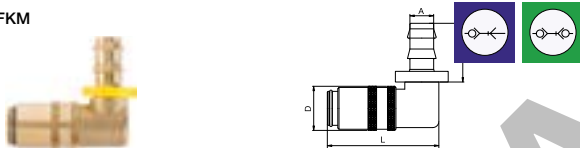

DN	Series	A		L	L1	D
6	10	6	10KBPR06MVX	46	20.4	18
		10	10KBPR10MVX	46	24.2	18
9	11	10	11KBPR10MVX	56.5	24.2	23
		13	11KBPR13MVX	56.5	27.9	23

10/11KBPH Coupler with valve, Push-Lok 45°

Brass, FKM

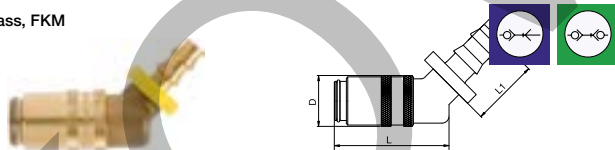


DN	Series	A		L	L1	D
6	10	6	10KBPH06MVX	41	20.4	18
		10	10KBPH10MVX	41	24.2	18
9	11	10	11KBPH10MVX	51	24.2	23
		13	11KBPH13MVX	51	27.9	23



Straight-Through / Single Shut-off

10/11/12SFA Plug without valve, Male Thread


Brass or stainless steel

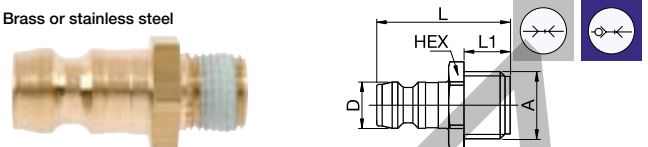


DN	Series	A		HEX	L	L1	D	Version		
6	10	M8 x 0.75	10SFAM08MXX	11	24	7	9	Brass		
		M10 x 1	10SFAM10MXX	11	24	7	9	Brass		
		M10 x 1	10SFAM10RXX	11	24	7	9	AISI 303		
		G1/8	10SFAW10MXN	11	24	7	9	Nickel-plated brass		
		G1/8	10SFAW10RXX	11	24	7	9	AISI 303		
		M12 x 1.5	10SFAM12MXX	14	27	10	9	Brass		
	9	11	G1/4	10SFAW13MXN	15	26	9	9	Nickel-plated brass	
			G1/4	10SFAW13RXX	15	26	9	9	AISI 303	
			M14 x 1.5	10SFAM14MXX	15	26	9	9	Brass	
		13	12	G3/8	10SFAW17MXN	17	30	10	9	Nickel-plated brass
				G1/8	11SFAW10MXN	14	25	8	13.5	Nickel-plated brass
				G1/4	11SFAW13MXN	15	26	9	13.5	Nickel-plated brass
9	11	G1/4	11SFAW13RXX	15	26	9	13.5	AISI 303		
		M14 x 1.5	11SFAM14MXX	15	26	9	13.5	Brass		
		M16 x 1.5	11SFAM16MXX	17	26	9	13.5	Brass		
	13	12	G3/8	11SFAW17MXN	17	26	9	13.5	Nickel-plated brass	
			G3/8	11SFAW17RXX	17	26	9	13.5	AISI 303	
			G1/2	12SFAW21MXN	22	47	12	19	Nickel-plated brass	
13	12	G3/4	12SFAW26MXN	27	51	16	19	Nickel-plated brass		

10/11SFAR Plug without valve, Male Thread 90° tapered

Brass

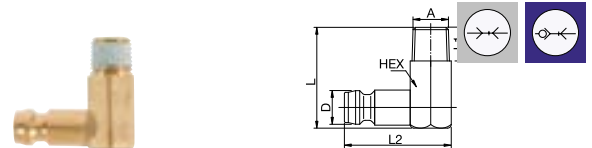


DN	Series	A		HEX	L	L1	L2	D	Version
6	10	M10 x 1	10SFAR10MXX	11	27	9	28.5	9	Brass
		R1/8	10SFAR10MXN	11	27	9	28.5	9	Nickel-plated brass
		R1/4	10SFAR13MXN	11	27	9	28.5	9	Nickel-plated brass
9	11	R1/4	11SFAR13MXN	15	34	11	32	13.5	Nickel-plated brass
		R3/8	11SFAR17MXN	15	34	11	32	13.5	Nickel-plated brass



 Straight-Through / Single Shut-off

10/11SFIW Plug without valve, Female Thread


Brass




DN	Series	A	HEX	L	L1	D	
6	10	G1/8	10SFIW10MXN	11	24	9	9
		G1/4	10SFIW13MXN	16	27	9	9
9	11	G1/4	11SFIW13MXN	16	33	10	13.5

10/11/12SFTF Plug without valve, Hose Barb

Brass

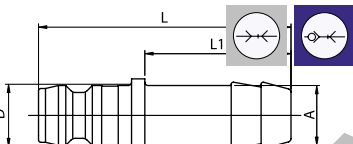


DN	Series	A	L	L1	D	
6	10	9	10SFTF09MXX	38	22	9
9	11	9	11SFTF09MXX	41	25	13.5
		13	11SFTF13MXX	41	25	13.5
13	12	19	12SFTF19MXX	61	32	19



 Straight-Through / Single Shut-off

10/11/12SBA Plug with valve, Male Thread

Brass, FKM




DN	Series	A	HEX	L	L1	D	Version	
6	10	G1/4	10SBAW13MVN	15	29	12	9	Nickel-plated brass
		M14 x 1.5	10SBAM14MVX	15	29	12	9	Brass
9	11	G1/4	11SBAW13MVN	15	31	12	13.5	Nickel-plated brass
		M16 x 1.5	11SBAM16MVX	17	30	12	13.5	Brass
		G3/8	11SBAW17MVN	17	30	12	13.5	Nickel-plated brass
13	12	G3/4	12SBAW26MVN	27	51	16	19	Nickel-plated brass



 Straight-Through

10/11VN Extension Plug, continuous Male Thread


Brass

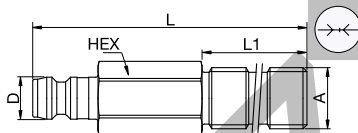

DN	Series	A	HEX	L	L1	D	
6	10	G1/8	10VN1010MXX	11	100	60	9
		G1/4	10VN1310MXX	14	100	60	9
9	11	G1/4	11VN1310MXX	14	100	60	13.5
		G3/8	11VN1710MXX	19	100	60	13.5

10/11VNXX Extension Plug, without Thread

Brass

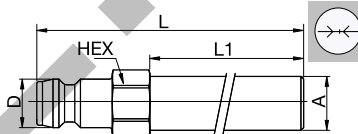


DN	Series	A	HEX	L	L1	D	
6	10	8	10VNXX10MXX	9	100	79	9
		10	10VNXX12MXX	11	120	100	9
		10	10VNXX24MXX	11	240	220	9
9	11	14	11VNXX15MXX	15	150	125	13.5
		14	11VNXX30MXX	15	300	275	13.5



SL

The 10 and 11 Rectus Moldtite coupling series with Safe-Lock technology were especially developed for connecting coolant lines and injection moulds. These stand out for their convenient, single-handed operation and a reliable O-ring seal. Widely used in Europe.

- Available in:
 - single shut-off, double shut-off or straight-through versions
- The straight-through couplings are equipped with nickel plated sleeves for quick and accurate visual differentiation
- The angular connections prevent kinks from forming in the hose
- Available on request:
 - series 10/11 are also available with special FFKM high-temperature seal for applications up to constant temperature 200°C



KF Straight-Through

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 16 l/min.
- Series 11: 50 l/min.

pressure drop 0.5 bar

KA Single Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 8 l/min.
- Series 11: 20 l/min.

pressure drop 0.5 bar

KB Double Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:


- Series 10: 7 l/min.
- Series 11: 15 l/min.

pressure drop 0.5 bar

* maximum static working pressure with design factor 4 to 1.

→|← Straight-Through


10/11KFA Coupler without valve, Male Thread, Safe-Lock

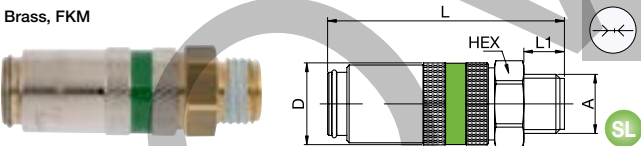

DN	Series	A	HEX	L	L1	D
6	10	G1/4	17	52.5	9	18
		M14 x 1.5	17	52.5	9	18
		G3/8	19	52.5	9	18
9	11	G1/4	22	62	9	24
		M16 x 1.5	22	62	9	24
		G3/8	22	62	9	24
		G1/2	22	65	12	24


→|← Straight-Through

10/11KFTR Coupler without valve, Hose Barb 90°, Safe-Lock

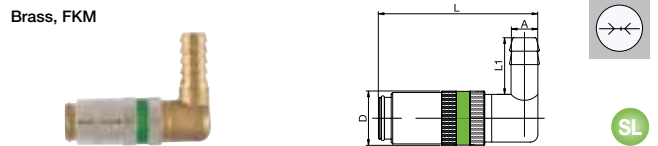


DN	Series	A	L	L1	D
6	10	9	53.5	22	18
9	11	13	63.5	28.5	24

10/11KFTF Coupler without valve, Hose Barb, Safe-Lock

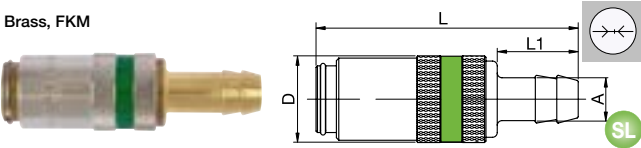


DN	Series	A	L	L1	D
6	10	9	60	22	18
9	11	13	71	25	24

10/11KFTH Coupler without valve, Hose Barb 45°, Safe-Lock

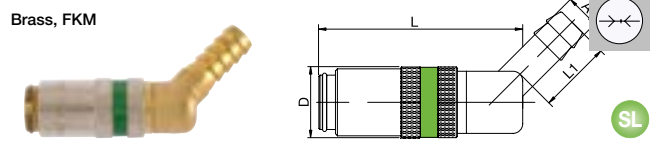


DN	Series	A	L	L1	D
6	10	9	60	22	18
9	11	13	60.5	25	24

Series 10/11 - Safe Locking Technology




10/11KBA Coupler with valve, Male Thread, Safe-Lock

Brass, FKM

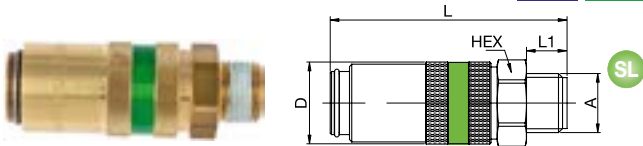


DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KBAW13MVXSL	17	52.5	9	18
		M14 x 1.5	10KBAM14MVXSL	17	52.5	9	18
		G3/8	10KBAW17MVXSL	19	52.5	9	18
9	11	G1/4	11KBAW13MVXSL	22	62	9	24
		M16 x 1.5	11KBAM16MVXSL	22	62	9	24
		G3/8	11KBAW17MVXSL	22	62	9	24
		G1/2	11KBAW21MVXSL	22	65	12	24



10/11KBTR Coupler with valve, Hose Barb 90°, Safe-Lock


Brass, FKM

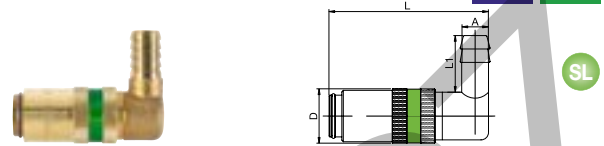

DN	Series	A		L	L1	D
6	10	9	10KBTR09MVXSL	53.5	22	18
9	11	13	11KBTR13MVXSL	63.5	28.5	24

10/11KBT Coupler with valve, Hose Barb, Safe-Lock


Brass, FKM

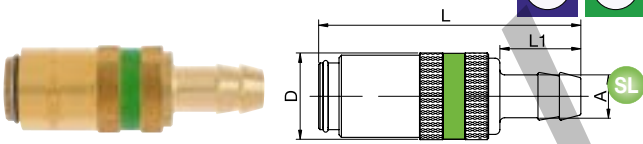

DN	Series	A		L	L1	D
6	10	9	10KBT09MVXSL	60	22	18
9	11	13	11KBT13MVXSL	71	25	24

10/11KBTH Coupler with valve, Hose Barb 45°, Safe-Lock

Brass, FKM

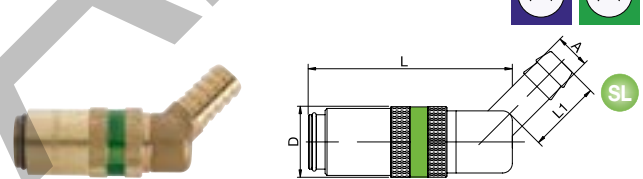


DN	Series	A		L	L1	D
6	10	9	10KBTH09MVXSL	60	22	18
9	11	13	11KBTH13MVXSL	60.5	25	24



SV

The 10 and 11 Rectus Moldtite coupling series with Safety Lock were especially developed for connecting coolant lines and injection moulds. These stand out for their convenient, single-handed operation and a reliable O-ring seal. Widely used in Europe. Coupling system with safety locking. Accidental uncoupling is prevented effectively and easily with the automatic safety lock.

- Available in:
 - single shut-off, double shut-off or straight-through versions
- The straight-through couplings are equipped with nickel plated sleeves for quick and accurate visual differentiation
- The angular connections prevent kinks from forming in the hose
- Available on request:
 - series 10/11 are also available with special FFKM high-temperature seal for applications up to constant temperature 200°C



KF Straight-Through

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 16 l/min.
- Series 11: 50 l/min.

pressure drop 0.5 bar

KA Single Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass, stainless steel
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 8 l/min.
- Series 11: 20 l/min.

pressure drop 0.5 bar

KB Double Shut-Off

Working Pressure*:
up to 15 bar

Material:

- Coupling: Brass
- Plug: Brass
- Seals: FKM

Working Temperature:
-15°C up to +200°C (FKM)

Flow Rate Water:

- Series 10: 7 l/min.
- Series 11: 15 l/min.

pressure drop 0.5 bar


* maximum static working pressure with design factor 4 to 1.

→|← Straight-Through

→|← Straight-Through

10/11KFA Coupler without valve, Male Thread


Brass, FKM

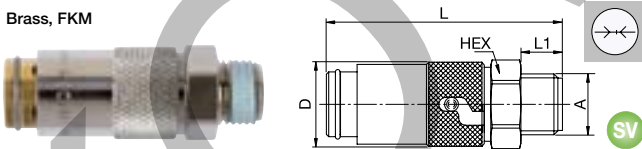

DN	Series	A	HEX	L	L1	D
6	10	G1/4	10KFAW13MVXSV	17	51	9 18
		M14 x 1.5	10KFAW14MVXSV	17	51	9 18
		G3/8	10KFAW17MVXSV	19	51	9 18
9	11	G1/4	11KFAW13MVXSV	22	59.5	9 23
		M16 x 1.5	11KFAW16MVXSV	22	59.5	9 23
		G3/8	11KFAW17MVXSV	22	59.5	9 23
		G1/2	11KFAW21MVXSV	22	62.5	12 23

10/11KFAR Coupler without valve, Male Thread 90°


Brass, FKM

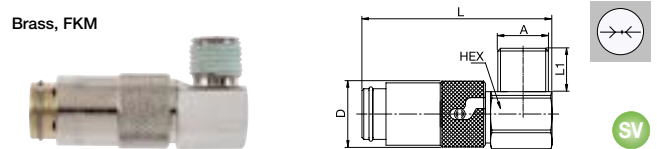

DN	Series	A	HEX	L	L1	D
6	10	G1/4	10KFAR13MVXSV	17	52.5	12 18
		M14 x 1.5	10KFAR14MVXSV	17	52.5	12 18
		G3/8	10KFAR17MVXSV	19	52.5	12 18
9	11	M16 x 1.5	11KFAR16MVXSV	22	61.5	12 23

10/11KFAH Coupler without valve, Male Thread 45°

Brass, FKM

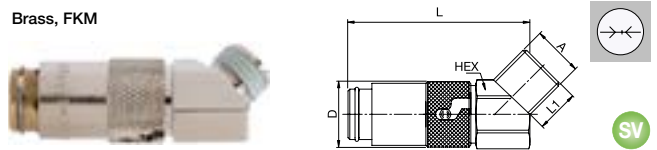

DN	Series	A	HEX	L	L1	D
6	10	G1/4	10KFAH13MVXSV	17	52.5	9 18
		M14 x 1.5	10KFAH14MVXSV	17	52.5	9 18
		G3/8	10KFAH17MVXSV	19	52.5	9 18
9	11	M16 x 1.5	11KFAH16MVXSV	22	61.5	9 23


Series 10/11 - Safe Locking Technology



Straight-Through

10/11KFTF Coupler without valve, Hose Barb


Brass, FKM

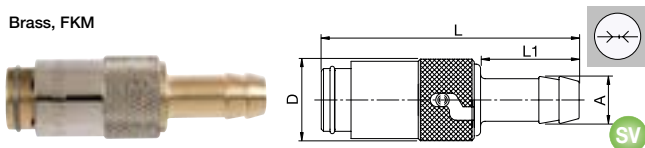

DN	Series	A		L	L1	D
6	10	9	10KFTF09MVXSV	57.5	22	18
9	11	13	11KFTF13MVXSV	68.5	25	23

10/11KFTR Coupler without valve, Hose Barb 90°


Brass, FKM

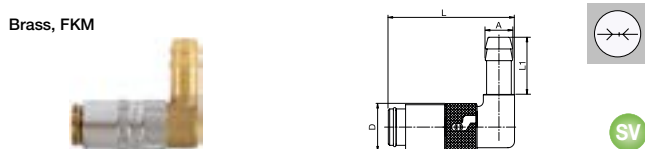


DN	Series	A		L	L1	D
6	10	9	10KFTR09MVXSV	48.5	22	18
9	11	13	11KFTR13MVXSV	56	28	23

10/11KFTH Coupler without valve, Hose Barb 45°

Brass, FKM

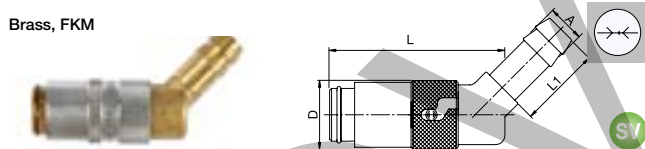


DN	Series	A		L	L1	D
6	10	9	10KFTH09MVXSV	46.5	22	18
9	11	13	11KFTH13MVXSV	56	28	23



Single Shut-off / Double Shut-off

10/11KBA Coupler with valve, Male Thread


Brass, FKM

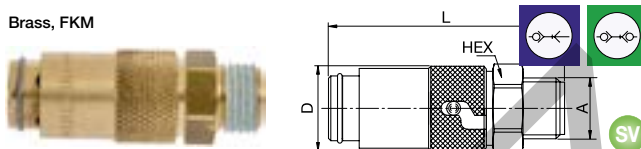

DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KBAW13MVXSV	17	51	9	18
		M14 x 1.5	10KBAM14MVXSV	17	51	9	18
		G3/8	10KBAW17MVXSV	19	51	9	18
9	11	G1/4	11KBAW13MVXSV	22	59.5	9	23
		M16 x 1.5	11KBAM16MVXSV	22	59.5	9	23
		G3/8	11KBAW17MVXSV	22	59.5	9	23
		G1/2	11KBAW21MVXSV	22	62.5	12	23

10/11KBAR Coupler with valve, Male Thread 90°


Brass, FKM

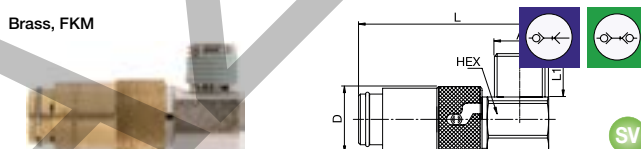

DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KBAR13MVXSV	17	52.5	12	18
		M14 x 1.5	10KBAR14MVXSV	17	52.5	12	18
9	11	M16 x 1.5	11KBAR16MVXSV	22	61.5	12	23

10/11KBAH Coupler with valve, Male Thread 45°


Brass, FKM

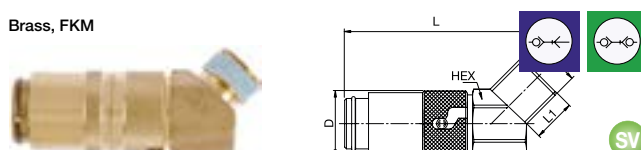

DN	Series	A		HEX	L	L1	D
6	10	G1/4	10KBAH13MVXSV	17	52.5	9	18
		M14 x 1.5	10KBAH14MVXSV	17	52.5	9	18
9	11	M16 x 1.5	11KBAH16MVXSV	22	61.5	9	23

10/11KBTF Coupler with valve, Hose Barb

Brass, FKM

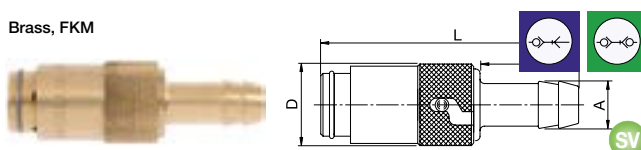


DN	Series	A		L	L1	D
6	10	9	10KBTF09MVXSV	57.5	22	18
9	11	13	11KBTF13MVXSV	68.5	25	23



Single Shut-off / Double Shut-off

10/11KBTR Coupler with valve, Hose Barb 90°

Brass, FKM




SV

DN	Series	A		L	L1	D
6	10	9	10KBTR09MVXSV	48.5	22	18
9	11	13	11KBTR13MVXSV	56	28	23

10/11KBTH Coupler with valve, Hose Barb 45°

Brass, FKM



SV

DN	Series	A		L	L1	D
6	10	9	10KBTH09MVXSV	46.5	22	18
9	11	13	11KBTH13MVXSV	56	28	23