




Compact industrial coupling system in brass for use with numerous gaseous and liquid media. High Flow valve for optimum flow and low pressure drop.

- Available on request:
 - with additional end connections
 - other seals for different temperature ranges and fluids



American Profile

KA Single Shut-Off

Working Pressure*:
up to 35 bar

Material:

- Coupling: Nickel plated brass
- Plug: Nickel Plated Brass
- Seals: NBR

Working Temperature:

-20°C up to +100°C (NBR)

Flow Rate Air:

7.500 l/min.

inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:

96 l/min.

pressure drop 0.5 bar

KB Double Shut-Off

Working Pressure*:
up to 35 bar

Material:

- Coupling: Nickel plated brass
- Plug: Nickel Plated Brass
- Seals: NBR

Working Temperature:

-20°C up to +100°C (NBR)

Flow Rate Air:

2.150 l/min.

inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:

27 l/min.

pressure drop 0.5 bar


* maximum static working pressure with design factor 4 to 1.



Single Shut-Off / Double Shut-off

38KBW Coupler with valve, Male Thread

Nickel-plated brass, NBR

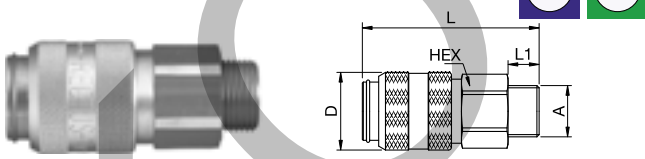


A	HEX	L	L1	D	
G1/2	38KBW21MPN	34	89	12	40
G3/4	38KBW26MPN	34	91	16	40
G1	38KBW33MPN	41	91	19	40



Single Shut-Off / Double Shut-off

38KBT Coupler with valve, Hose Barb


Nickel-plated brass, NBR

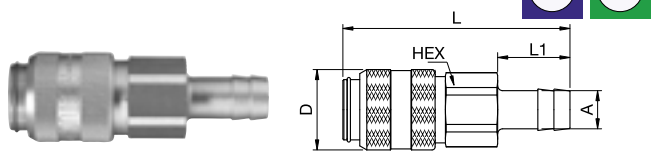

A	HEX	L	L1	D	
13	38KBT13MPN	34	105	28	40
19	38KBT19MPN	34	113	36	40


38KBW Coupler with valve, Female Thread

Nickel-plated brass, NBR

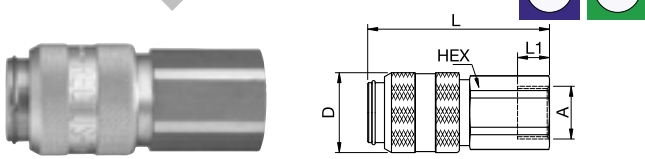

A	HEX	L	L1	D	
G1/2	38KBW21MPN	34	95	20	40
G3/4	38KBW26MPN	34	91	14	40
G1	38KBW33MPN	41	92	20	40

Series 38 - Brass/Steel




Single Shut-Off



Double Shut-off

38SFAW Plug without valve, Male Thread


Nickel-plated brass



A		HEX	L	L1
G1/2	38SFAW21MXN	24	54	12
G3/4	38SFAW26MXN	27	58	16
G1	38SFAW33MXN	36	63	19

38SBAW Plug with valve, Male Thread


Nickel-plated brass, NBR



A		HEX	L	L1
G1/2	38SBAW21MPN	34	85	12
G3/4	38SBAW26MPN	34	87	16
G1	38SBAW33MPN	41	87	19

38SFIW Plug without valve, Female Thread


Nickel-plated brass



A		HEX	L	L1
G1/2	38SFIW21MXN	24	49	12
G3/4	38SFIW26MXN	30	54	18
G1	38SFIW33MXN	41	61	24

38SBIW Plug with valve, Female Thread


Nickel-plated brass, NBR



A		HEX	L	L1
G1/2	38SBIW21MPN	34	87	16
G3/4	38SBIW26MPN	34	87	16
G1	38SBIW33MPN	41	88	26

38SFTF Plug without valve, Hose Barb


Nickel-plated brass



A		L	L1	D
13	38SFTF13MXN	65	28	30
19	38SFTF19MXN	73	36	30

38SBTF Plug with valve, Hose Barb

Nickel-plated brass, NBR



A		HEX	L	L1
13	38SBTF13MPN	34	103	28
19	38SBTF19MPN	34	109	36