

CRISTALCORD BRAIDED GLASS CLEAR




APPLICATION - ANWENDUNG - USO - APPLICATION

[EN] for conveying fluids, air, powdered foods, salts, light chemicals.

[DE] geeignet als bewässerungsschlauch, zum durchleiten von leichten chemikalien, sowie säuren und laugen.

[ES] para sistemas de limpieza automáticos, indicadores de nivel, aire comprimido, industria alimenticia.

[FR] pour la distribution de l'eau, liquides alimentaires, air comprimé e a la plupart des produits chimiques

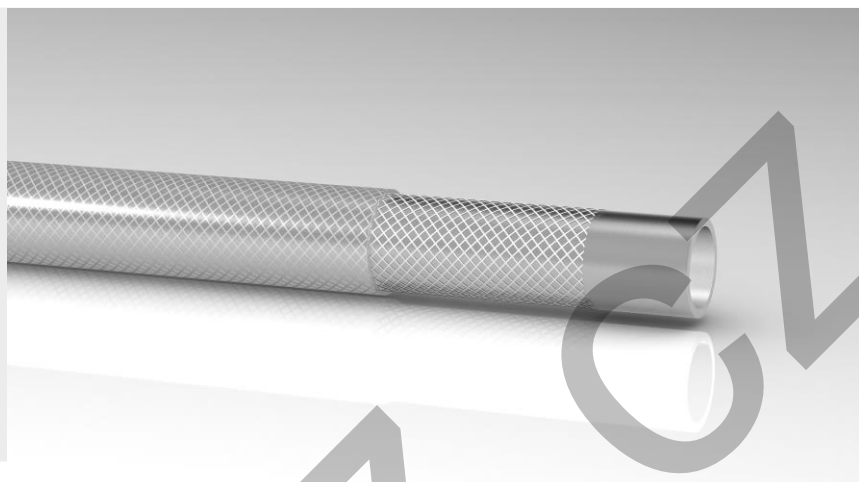

STRUCTURE - AUFBAU - ESTRUCTURA - STRUCTURE

[EN] **Tube:** non-toxic transparent pvc.

Reinforcement: high tensile synthetic textile.

Cover: abrasion, ozone and weather resistant transparent pvc allowing easy inspection during service.

[DE] **Seele:** toxidenfrei, transparenter pvc.

Einlagen: hochfestes synthetisches textiltgewebe **Decke:** abriebfester, ozon - und witterungsbeständiger, transparenter pvc..

[ES] **Sustrato:** pvc no-tóxico transparente.

Refuerzo: con inserciones textiles con alta resistencia.

Cobertura: pvc transparente resistente a la abrasión, ozono y agentes atmosféricos.

[FR] **Tube:** tuyau lisse tansparent en pvc, non toxique.

Reinforcement: insertion textile haute tenacite. **Revetement:** lisse, transparent resistant a l'abrasion et aux agents atmospheriques.

mm	mm	gr/mt	bar	bar	m
5	3,0	81	20	60	100
6	3,0	83	20	60	100
7	3,0	119	20	60	100
8	3,0	117	20	60	100
10	3,0	138	15	45	100
12	3,0	159	10	30	100
13	3,0	169	10	30	100
15	3,0	190	10	30	50
16	3,0	201	10	30	50
19	3,5	280	10	30	50
22	4,0	374	8	24	50
25	4,0	417	8	24	50
30	4,0	490	7	21	50
32	4,5	560	7	21	50
35	5,0	686	7	21	50
38	5,0	743	5	15	50
40	5,0	777	5	15	50
45	5,0	840	5	15	50
50	5,0	949	5	15	50



RECOMMENDED CLAMP/COLLAR - EMPFOHLENE KLAMMER/KRAGEN - ABRAZADERA/COLLAR RECOMENDADO - COLLIER/COLLIER RECOMMANDÉ

STF – Hose clamps with screw
SGT – Stepp less



-5°C / +60°C
+23°F / +140°F



NORM.: REG. EU 10/2011, FOR
SIMULANT TYPE A-B-C, ISO 1307