


90° Swept Female ORFS Swivel

23.4494.

ISO 12151-5 / ISO 8434-2 / SAE J516 / SAE J514

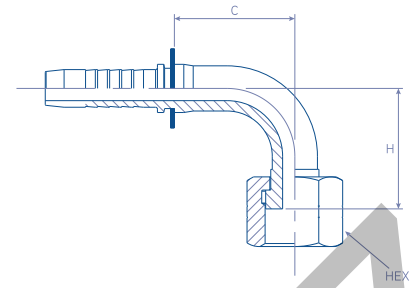

REFERENCE	hose dash	hose Ø inch	thread inch	C cut off mm	H mm	HEX mm
23.4494.0404	-4	1/4"	9/16" - 18	26.0	21.0	17
23.4494.0406	-4	1/4"	11/16" - 16	27.0	25.0	22
23.4494.0506	-5	5/16"	11/16" - 16	33.0	27.5	22
23.4494.0606	-6	3/8"	11/16" - 16	34.5	29.0	22
23.4494.0608	-6	3/8"	13/16" - 16	35.5	30.0	24
23.4494.0808	-8	1/2"	13/16" - 16	40.0	35.0	24
23.4494.0810	-8	1/2"	1" - 14	40.5	36.5	30
23.4494.0812	-8	1/2"	1.3/16" - 14	42.0	43.0	36
23.4494.1008	-10	5/8"	13/16" - 16	42.0	46.0	24
23.4494.1010	-10	5/8"	1" - 14	54.0	50.0	30
23.4494.1012	-10	5/8"	1.3/16" - 14	53.0	48.0	36
23.4494.1210	-12	3/4"	1" - 14	55.0	50.0	30
23.4494.1212	-12	3/4"	1.3/16" - 14	57.0	49.0	36
23.4494.1216	-12	3/4"	1.7/16" - 12	57.0	52.0	41
23.4494.1616	-16	1"	1.7/16" - 12	68.0	59.0	41
23.4494.1620	-16	1"	1.11/16" - 12	68.0	77.0	50
23.4494.2020	-20	1.1/4"	1.11/16" - 12	85.0	77.0	50
23.4494.2424	-24	1.1/2"	2" - 12	98.0	94.0	60

MATERIAL: Carbon Steel

FINISH: Chromium-(VI) Free plating / ROHS compliant

VERSIONS: Stainless Steel (add an 'S' at the end of the REFERENCE)