

# AGROCONN PVC 40 BAR




## APPLICATION - ANWENDUNG - USO - APPLICATION

[EN] for spraying of pesticides and fertilizers in agriculture

[DE] geeignet als schadlingsbekämpfungsschlauch im hochdruckbereich.

[ES] idóneo para equipo de motobombas irrigacion agrícola con insecticidas, pesticidas y antiparasitarios.

[FR] pour pulvérisation agricole

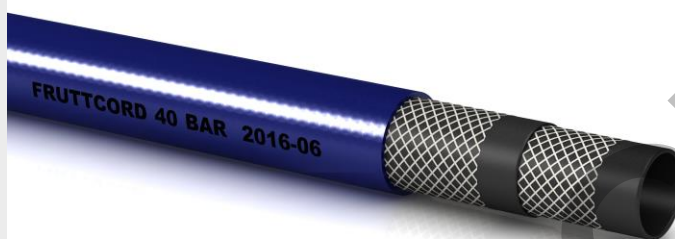

## STRUCTURE - AUFBAU - ESTRUCTURA - STRUCTURE

[EN] **Tube:** special pvc compound resistant to pesticides and fertilizers.

**Reinforcement:** high tensile synthetic textile.

**Cover:** abrasion, ozone and weather resistant special pvc compound..

[DE] **Seele:** spezielle pvc-mischung, beständig gegen schädlingbekämpfungsmittel und dünger.

**Einlagen:** hochfestes synthetisches textildgewebe.

**Decke:** abriebfeste, ozon- und witterungsbeständige, spezielle pvc-mischung.

[ES] **Sustrato:** mezcla especial en pvc resistente al paso de anticriptogámicos y fertilizantes. **Refuerzo:** inserciones textiles con alta resistencia.

**Cobertura:** mezcla especial en pvc resistente a la abrasión, ozono y agentes atmosféricos.

[FR] **Construction:** tuyau lisse et flexible en pvc souple resistant aux engrais et pesticides.

**Renforcement:** insertion textile haute tenacite.

**Revetement:** lisse, en matiere pvc speciale resistente a l'abrasion, aux agents atmospheriques et a la plupart des produits chimiques

mm	mm	bar	bar	gr/mt	mt
8	14	40	120	158	100
10	16	40	120	185	100
13	19	40	120	225	100
16	23	40	120	300	50
19	26	40	120	360	50
25	34	40	120	565	50
32	44	40	120	723	50



## RECOMMENDED CLAMP/COLLAR - EMPFOHLENE KLAMMER/KRAGEN - ABRAZADERA/COLLAR RECOMENDADO - COLLIER/COLLIER RECOMMANDÉ

STF – hose clamp with screw  
SGT – Step less



-10°C / +60°C  
+14°F / +140°F



NORM.: ISO 1307