

# AGROCONN PVC 80 BAR




## APPLICATION - ANWENDUNG - USO - APPLICATION

[EN] for spraying of pesticides and fertilizers in agriculture

[DE] geeignet als schadlingsbekämpfungsschlauch im hochdruckbereich.

[ES] idóneo para equipo de motobombas irrigacion agrícola con insecticidas, pesticidas y antiparasitarios.

[FR] pour pulvérisation agricole

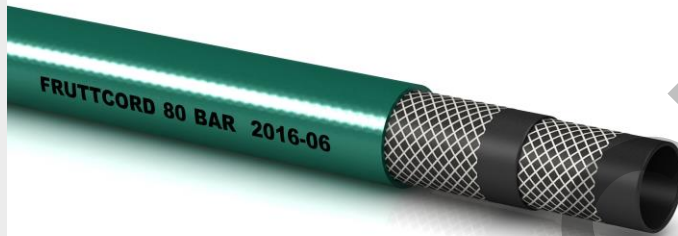

## STRUCTURE - AUFBAU - ESTRUCTURA - STRUCTURE

[EN] **Tube:** special pvc compound resistant to pesticides and fertilizers.

**Reinforcement:** high tensile synthetic textile.

**Cover:** abrasion, ozone and weather resistant special pvc compound..

[DE] **Seele:** spezielle pvc-mischung, beständig gegen schädlingbekämpfungsmittel und dünger.

**Einlagen:** hochfestes synthetisches textildgewebe.

**Decke:** abriebfeste, ozon- und witterungsbeständige, spezielle pvc-mischung.

[ES] **Sustrato:** mezcla especial en pvc resistente al paso de anticriptogámicos y fertilizantes. **Refuerzo:** inserciones textiles con alta resistencia.

**Cobertura:** mezcla especial en pvc resistente a la abrasión, ozono y agentes atmosféricos.

[FR] **Construction:** tuyau lisse et flexible en pvc souple resistant aux engrais et pesticides.

**Renforcement:** insertion textile haute tenacite.

**Revetement:** lisse, en matiere pvc speciale resistente a l'abrasion, aux agents atmospheriques et a la plupart des produits chimiques

mm	mm	bar	bar	gr/mt	mt
8	15	80	200	185	100
10	18	80	200	245	100
13	22	80	200	260	100
16	25	80	160	402	50
19	29	80	160	580	50
25	35	80	240	763	50



## RECOMMENDED CLAMP/COLLAR - EMPFOHLENE KLAMMER/KRAGEN - ABRAZADERA/COLLAR RECOMENDADO - COLLIER/COLLIER RECOMMANDÉ

STF – hose clamp with screw  
SGT – Step less



-10°C / +60°C  
+14°F / +140°F



NORM.: ISO 1307